

Computing the Extreme Points of Tropical Polyhedra^{*}

Xavier Allamigeon^{1,3}, Stéphane Gaubert², and Éric Goubault³

¹ EADS Innovation Works, SE/IS – Suresnes, France

² INRIA Saclay and CMAP, Ecole Polytechnique, France

³ CEA, LIST MeASI – Gif-sur-Yvette, France

firstname.lastname@{eads.net,inria.fr,cea.fr}

Abstract. We present a novel approach to compute efficiently all the extreme elements of tropical polyhedra, which are the analogues of convex polyhedra in the max-plus algebra. It relies on a method successively eliminating the inequalities, and in which redundant generators are removed a priori. The cornerstone of this method is a new combinatorial characterization of the extreme elements of tropical polyhedra defined by inequalities: we prove that the extremality of an element amounts to the existence of a strongly connected component reachable from any other in a directed hypergraph. We show that the latter property can be checked in almost linear time in the size of the hypergraph. We give theoretical bounds and experimental results on various benchmarks, including instances arising from an application to static analysis, showing that our algorithm is faster than the previous ones by several orders of magnitude.

^{*} This work was partially supported by Arpege programme of the French National Agency of Research (ANR), project “ASOPT”, number ANR-08-SEGI-005.

1 Introduction

Tropical polyhedra are the analogues of convex polyhedra in tropical algebra. The latter deals with structures like the max-plus semiring $\mathbb{R}_{\max}$ (also called *max-plus algebra*), which is the set $\mathbb{R} \cup \{-\infty\}$, equipped with the addition $x \oplus y := \max(x, y)$ and the multiplication $x \otimes y := x + y$.

The study of the analogues of convex sets in tropical or max-plus algebra is an active research topic, and has been treated in various guises. It arose in the work of Zimmerman [1], following a way opened by Vorobyev [2], motivated by optimization theory. Max-plus cones were studied by Cuninghame-Green [3]. Their theory was independently developed by Litvinov, Maslov and Shpiz [4] (see also [5]) with motivations from variations calculus and asymptotic analysis, and by Cohen, Gaubert, and Quadrat [6, 7] who initiated a “geometric approach” of discrete event systems [8], further developed in [9, 10]. In [11, 12], Singer recasted this theory in the setting of abstract convexity [13]. Briec and Horvath [14] had similar motivations. The field has attracted recently much attention after the work of Develin and Sturmfels [15], who pointed out important connections with tropical geometry and applications to phylogenetical analysis. They developed a new combinatorial point of view, thinking of tropical polyhedra as polyhedral complexes in the usual sense (see also the series of works by Joswig, Yu, and the same authors [16–19]).

A tropical polyhedron can be represented in two different ways, either internally, in terms of extreme points and rays, or externally, in terms of linear inequalities (see Sect. 2 for details). As in the classical case, passing from the external description of a polyhedron to its internal description is a fundamental computational issue. This is the object of the present paper.

Butkovič and Hegedus [20] gave an algorithm to compute the generators of a tropical polyhedral cone described by linear inequalities, with motivations from economic problems. Gaubert gave a similar one and derived the equivalence between the internal and external representations [21, Ch. III] (see also [22]). Both algorithms rely on a successive elimination of inequalities, but have the inconvenient of squaring at each step the number of candidate generators. Then, an elimination technique must be incorporated to eliminate the redundant candidates. A first implementation of these ideas was included in the Maxplus toolbox of SCILAB [23]. Joswig developed a different approach, implemented in POLYMAKE [24], in which a tropical polytope is represented as a polyhedral complex [19]. However, the latter has many more generators.

The present work grew out of an application to software verification by static analysis [25]. Tropical polyhedra are used to automatically discover complex relations involving the operators $\min$ and $\max$ which hold over the variables of a program. These relations allow to prove the absence of bugs in the program. The execution time of the static analyzer directly depends on the efficiency of the algorithm computing the extreme elements of tropical polyhedra. While the results were encouraging, all the previously developed algorithms were too slow to make the static analyzer usable in practice. Similar limitations were observed in other applications [9, 10].

Contributions. We develop a new algorithm which computes the extreme elements of tropical polyhedra. It is based on a successive elimination of inequalities, and a result (Th. 1) allowing one, given a polyhedron $\mathcal{P}$ and a tropical halfspace $\mathcal{H}$, to construct a list of candidates for the generators of $\mathcal{P} \cap \mathcal{H}$. The key ingredient is a combinatorial characterization of the extreme generators of a polyhedron defined externally (Th. 2 and 3): we reduce the verification of the extremality of a candidate to the existence of a strongly connected component reachable from any other in a directed hypergraph. We show that the latter problem can be solved very efficiently (Th. 4), a result which is of independent interest. We include a complexity analysis and experimental results (Sect. 6), showing that the new algorithm outperforms the earlier ones, allowing us to solve instances which were previously by far inaccessible.

2 Tropical Polyhedra and Polyhedral Cones

The neutral elements for the addition $\oplus$ and multiplication $\otimes$, *i.e.*, the zero and the unit, will be denoted by $0 := -\infty$ and $1 := 0$, respectively. The tropical analogues of the operations on

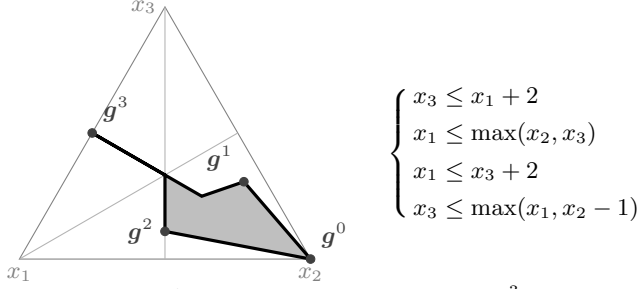


Fig. 1. A tropical polyhedral cone in $\mathbb{R}_{\max}^3$

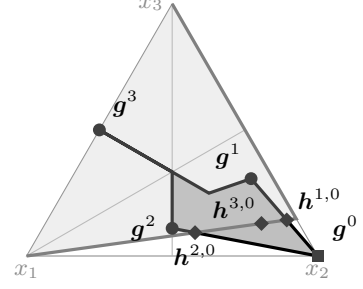


Fig. 2. Intersecting a cone with a halfspace

vectors and matrices are defined naturally. The elements of $\mathbb{R}_{\max}^d$, the d th fold Cartesian product of $\mathbb{R}_{\max}$, will be thought of as vectors, and denoted by bold symbols, like $\mathbf{x} = (x_1, \dots, x_d)$.

A *tropical halfspace* is a set of the vectors $\mathbf{x} = (x_i) \in \mathbb{R}_{\max}^d$ verifying an inequality constraint of the form $\max_{1 \leq i \leq d} a_i + x_i \leq \max_{1 \leq i \leq d} b_i + x_i$, with $a_i, b_i \in \mathbb{R}_{\max}^d$. A *tropical polyhedral cone* is defined as the intersection of n halfspaces. It can be equivalently written as the set of the solutions of a system of inequality constraints $A\mathbf{x} \leq B\mathbf{x}$. Here, $A = (a_{ij})$ and $B = (b_{ij})$ are $n \times d$ matrices with entries in $\mathbb{R}_{\max}$, concatenation denotes the matrix product (with the laws of $\mathbb{R}_{\max}$), and $\leq$ denotes the standard partial ordering of vectors. For sake of readability, tropical polyhedral cones will be often referred to as *polyhedral cones* or *cones*.

Tropical polyhedral cones are known to be generated by their extreme rays [26–28]. Recall that a *ray* is the set of scalar multiples of a non-zero vector $\mathbf{u}$. It is *extreme* in a cone $\mathcal{C}$ if $\mathbf{u} \in \mathcal{C}$ and if $\mathbf{u} = \mathbf{v} \oplus \mathbf{w}$ with $\mathbf{v}, \mathbf{w} \in \mathcal{C}$ implies that $\mathbf{u} = \mathbf{v}$ or $\mathbf{u} = \mathbf{w}$. A finite set $G = (\mathbf{g}^i)_{i \in I}$ of vectors is said to *generate* a polyhedral cone $\mathcal{C}$ if each $\mathbf{g}^i$ belongs to $\mathcal{C}$, and if every vector $\mathbf{x}$ of $\mathcal{C}$ can be written as a *tropical linear combination* $\bigoplus_i \lambda_i \mathbf{g}^i$ of the vectors of G (with $\lambda_i \in \mathbb{R}_{\max}$). The tropical analogue of the Minkowski theorem [27, 28] shows in particular that every generating set of a cone that is minimal for inclusion is obtained by selecting precisely one (non-zero) element in each extreme ray. Note that in tropical linear combinations, the requirement that λ_i be nonnegative is omitted. Indeed, $0 = -\infty \leq \lambda$ holds for all scalar $\lambda \in \mathbb{R}_{\max}$.

A tropical polyhedron of $\mathbb{R}_{\max}^d$ is the affine analogue of a tropical polyhedral cone. It is defined by a system of inequalities of the form $A\mathbf{x} \oplus \mathbf{c} \leq B\mathbf{x} \oplus \mathbf{d}$. It can be also expressed as the set of the tropical affine combinations of its generators. The latter are of the form $\bigoplus_{i \in I} \lambda_i \mathbf{v}^i \oplus \bigoplus_{j \in J} \mu_j \mathbf{r}^j$, where the $(\mathbf{v}^i)_{i \in I}$ are the extreme points, the $(\mathbf{r}^j)_{j \in J}$ a set formed by one element of each extreme ray, and $\bigoplus_i \lambda_i = 1$. It is known [7, 27] that every tropical polyhedron of $\mathbb{R}_{\max}^d$ can be represented by a tropical polyhedral cone of $\mathbb{R}_{\max}^{d+1}$ thanks to an analogue of the homogenization method used in the classical case (see [29, Sect. 1.5]). Then, the extreme rays of the cone are in one-to-one correspondence with the extreme generators of the polyhedron. That is why, in the present paper, we will only state the main results for cones, leaving to the reader the derivation of the affine analogues, along the lines of [27].

In the sequel, we will illustrate our results on the polyhedral cone $\mathcal{C}$ given in Fig. 1, defined by the system in the right side. The left side is a representation of $\mathcal{C}$ in barycentric coordinates: each element (x_1, x_2, x_3) is represented as a barycenter with weights $(e^{x_1}, e^{x_2}, e^{x_3})$ of the three vertices of the outermost triangle. Then two elements of a same ray are represented by the same point. The cone $\mathcal{C}$ is depicted in solid gray (the black border is included), and is generated by the extreme elements $\mathbf{g}^0 = (0, 0, 0)$, $\mathbf{g}^1 = (-2, 1, 0)$, $\mathbf{g}^2 = (2, 2, 0)$, and $\mathbf{g}^3 = (0, 0, 0)$.

3 Principle of the Algorithm

Our algorithm is based on a successive elimination of inequalities. Given a polyhedral cone $\mathcal{C}$ defined by a system of n constraints, the algorithm computes by induction on k ($0 \leq k \leq n$) a generating set G_k of the intermediate cone defined by the first k constraints. Then G_n forms a generating set of the cone $\mathcal{C}$. Passing from the set G_k to the set G_{k+1} relies on a result which, given a polyhedral cone $\mathcal{K}$ and a tropical halfspace $\mathcal{H} = \{\mathbf{x} \mid \mathbf{a}\mathbf{x} \leq \mathbf{b}\mathbf{x}\}$, allows to build a generating set G' of $\mathcal{K} \cap \mathcal{H}$ from a generating set G of $\mathcal{K}$:

Theorem 1. Let $\mathcal{K}$ be a polyhedral cone generated by a set $G \subset \mathbb{R}_{\max}^d$, and $\mathcal{H} = \{ \mathbf{x} \mid \mathbf{a}\mathbf{x} \leq \mathbf{b}\mathbf{x} \}$ a tropical halfspace ($\mathbf{a}, \mathbf{b} \in \mathbb{R}_{\max}^{1 \times d}$). Then the polyhedral cone $\mathcal{K} \cap \mathcal{H}$ is generated by the set:

$$\{ \mathbf{g} \in G \mid \mathbf{a}\mathbf{g} \leq \mathbf{b}\mathbf{g} \} \cup \{ (\mathbf{a}\mathbf{h})\mathbf{g} \oplus (\mathbf{b}\mathbf{g})\mathbf{h} \mid \mathbf{g}, \mathbf{h} \in G, \mathbf{a}\mathbf{g} \leq \mathbf{b}\mathbf{g}, \text{ and } \mathbf{a}\mathbf{h} > \mathbf{b}\mathbf{h} \}.$$

As an example, consider the cone defined in Fig. 1 and the constraint $x_2 \leq x_3 + 2.5$ (depicted in semi-transparent gray in Fig. 2). The three generators $\mathbf{g}^1$, $\mathbf{g}^2$, and $\mathbf{g}^3$ satisfy the constraint, while $\mathbf{g}^0$ does not. Their combinations are the elements $\mathbf{h}^{1,0}$, $\mathbf{h}^{2,0}$, and $\mathbf{h}^{3,0}$ respectively.

Nevertheless, Th. 1, and subsequently the whole inductive approach, may return non-extreme elements. (In the example represented in Fig. 2, only $\mathbf{h}^{1,0}$ is extreme, whereas $\mathbf{h}^{2,0}$ and $\mathbf{h}^{3,0}$ are not.) As mentioned above, the extreme rays of a cone form a minimal generating set, so that it is useless to compute non-extreme elements. On top of that, the latter considerably degrade the performance of the approach: at each inductive step, the number of generators, among which many can be non-extreme, grows quadratically in the worst case (because of the pairwise combinations in Th. 1 of the $\mathbf{g}$ and $\mathbf{h}$). Hence the complexity of the inductive method in total is $O(d^{2^n})$ both in time and space, which is untractable.

For that reason, the approach is improved by including the elimination of non-extreme elements at each step of the induction. This idea is implemented in the algorithm COMPUTE-EXTREME (Fig. 3), which returns one element of each extreme ray of the cone $\mathcal{C}$. The argument n corresponds to the number of constraints of the system $\mathbf{A}\mathbf{x} \leq \mathbf{B}\mathbf{x}$. When it is equal to 0, the cone coincides with $\mathbb{R}_{\max}^d$, so that it is generated by the tropical canonical basis $(\epsilon^i)_{1 \leq i \leq d}$ (where $\epsilon_i^i = 1$ and $\epsilon_j^i = 0$ if $j \neq i$). Otherwise, the system is split into $\mathbf{C}\mathbf{x} \leq \mathbf{D}\mathbf{x}$ formed by the $(n-1)$ first inequalities, and $\mathbf{a}\mathbf{x} \leq \mathbf{b}\mathbf{x}$ by the last one. Then the elements provided by Th. 1 are computed from the set G of extreme elements of the intermediary cone $\mathcal{D} = \{ \mathbf{x} \mid \mathbf{C}\mathbf{x} \leq \mathbf{D}\mathbf{x} \}$. Note that the extremality test (Line 10) is applied only on the combinations $(\mathbf{a}\mathbf{g}^j)\mathbf{g}^i \oplus (\mathbf{b}\mathbf{g}^i)\mathbf{g}^j$, and not on the elements $\mathbf{g} \in G^{\leq}$ which satisfies $\mathbf{a}\mathbf{g} \leq \mathbf{b}\mathbf{g}$. Indeed, the latter belong to $\mathcal{C}$, and by induction hypothesis, they are extreme in the cone $\mathcal{D}$, which is included in $\mathcal{C}$. Therefore, they can be shown to be also extreme in $\mathcal{C}$. Furthermore, before being appended to the set H , every combination $\mathbf{h} = (\mathbf{a}\mathbf{g}^j)\mathbf{g}^i \oplus (\mathbf{b}\mathbf{g}^i)\mathbf{g}^j$ is first normalized to the element $\kappa\mathbf{h}$, so that the set H contains only one element of each represented ray.

The efficiency of the extremality test used at Line 10 plays a crucial role in the whole performance of COMPUTEEXTREME. The existing extremality criteria, which are implemented in the Maxplus toolbox of SCILAB [23] and in our previous work [25], are based on the following property: $\mathbf{h}$ is extreme in the cone generated by a given set H if and only if $\mathbf{h}$ can not be expressed as the tropical linear combination of the elements of H which are not proportional to it. This property can be checked in $O(d \times |H|)$ time using residuation (see [28] for algorithmic details). If this criterion is used in our algorithm, the amortized complexity of the extremality test (over the sequence of tests performed in the loop from Lines 8 to 13) is $O(d \times |G|^2)$, where G is the set of the extreme rays of the intermediary cone $\mathcal{D}$. Unfortunately, as confirmed theoretically and by our experiments, the set G can be very large, even if the cone $\mathcal{C}$ has few extreme rays (see

```

1: procedure COMPUTEEXTREME( $A, B, n$ )   $\triangleright A, B \in \mathbb{R}_{\max}^{n \times d}$ 
2:   if  $n = 0$  then   $\triangleright$  Base case
3:     return  $(\epsilon_i)_{1 \leq i \leq d}$ 
4:   else   $\triangleright$  Inductive case
5:     split  $\mathbf{A}\mathbf{x} \leq \mathbf{B}\mathbf{x}$  into  $\mathbf{C}\mathbf{x} \leq \mathbf{D}\mathbf{x}$  and  $\mathbf{a}\mathbf{x} \leq \mathbf{b}\mathbf{x}$ , with  $\mathbf{C}, \mathbf{D} \in \mathbb{R}_{\max}^{(n-1) \times d}$  and  $\mathbf{a}, \mathbf{b} \in \mathbb{R}_{\max}^{1 \times d}$ 
6:      $G := \text{COMPUTEEXTREME}(\mathbf{C}, \mathbf{D}, n-1)$ 
7:      $G^{\leq} := \{ \mathbf{g}^i \in G \mid \mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i \}$ ,  $G^> := \{ \mathbf{g}^j \in G \mid \mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j \}$ ,  $H := G^{\leq}$ 
8:     for all  $\mathbf{g}^i \in G^{\leq}$  and  $\mathbf{g}^j \in G^>$  do
9:        $\mathbf{h} := (\mathbf{a}\mathbf{g}^j)\mathbf{g}^i \oplus (\mathbf{b}\mathbf{g}^i)\mathbf{g}^j$ 
10:      if  $\mathbf{h}$  is extreme in  $\{ \mathbf{x} \mid \mathbf{A}\mathbf{x} \leq \mathbf{B}\mathbf{x} \}$  then
11:        append  $\kappa\mathbf{h}$  to  $H$ , where  $\kappa$  is the opposite of the first non-0 coefficient of  $\mathbf{h}$ 
12:      end
13:    done
14:  end
15:  return  $H$ 
16: end
```

Fig. 3. Our main algorithm computing the extreme rays of tropical cones




Fig. 4. Extremality of g^2




Fig. 5. The set $g^2 + T(g^2, C)$




Fig. 6. The $\{0, 1\}$ -elements of $T(g^2, C)$

Sect. 6 for benchmarks and a discussion on the size of G). As a consequence, this extremality test is the bottleneck of the algorithm, and the latter may not terminate in a practical time even for small values of d or n (see Sect. 6). This motivated us to develop a novel approach to efficiently characterize the extremality of a vector in a cone defined by inequality constraints.

4 Characterizing Extremality from Inequality Constraints

Preliminaries on Extremality. The following lemma, which is a variation on the proof of Th. 3.1 of [27] and on Th. 14 of [28], shows that extremality can be expressed as a minimality property:

Proposition 1. *Given a polyhedral cone $C \subset \mathbb{R}_{\max}^d$, g is extreme if and only if there exists $1 \leq t \leq d$ such that g is a minimal element of the set $\{x \in C \mid x_t = g_t\}$, i.e. $g \in C$ and for each $x \in C$, $(x \leq g \text{ and } x_t = g_t)$ implies $x = g$. In that case, g is said to be extreme of type t .*

In Fig. 4, the light gray area represents the set of the elements (x_1, x_2, x_3) of $\mathbb{R}_{\max}^3$ such that $(x_1, x_2, x_3) \leq g^2$ implies $x_1 < g^2_1$. It clearly contains the whole cone except g^2 , which shows that g^2 is extreme of type 1.

A *tropical segment* is the set of the tropical linear combinations of two points. Using the fact that a tropical segment joining two points of a polyhedral cone C yields a continuous path included in C , one can check that g is extreme of type t in C if and only if there is a neighborhood N of g such that g is minimal in $\{x \in C \cap N \mid x_t = g_t\}$. Thus, extremality is a local property.

Finally, the extremality of an element g in a cone C can be equivalently established by considering the vector formed by its non-0 coordinates. Formally, let $\text{supp}(x) := \{i \mid x_i \neq 0\}$ for any $x \in \mathbb{R}_{\max}^d$. One can show that g is extreme in C if and only if it is extreme in $\{x \in C \mid \text{supp}(x) \subset \text{supp}(g)\}$. This allows to assume that $\text{supp}(g) = \{1, \dots, d\}$ without loss of generality.

Expressing Extremality Using the Tangent Cone. For now, the polyhedral cone C is supposed to be defined by a system $Ax \leq Bx$ of n inequalities.

Consider an element g of the cone C , which we assume, from the previous discussion, to satisfy $\text{supp}(g) = \{1, \dots, d\}$. In this context, the *tangent cone* of C at g is defined as the tropical polyhedral cone $T(g, C)$ of $\mathbb{R}_{\max}^d$ given by the system of inequalities

$$\max_{i \in \arg \max(A_k g)} x_i \leq \max_{j \in \arg \max(B_k g)} x_j \quad \text{for all } k \text{ such that } A_k g = B_k g, \quad (1)$$

where for each row vector $c \in \mathbb{R}_{\max}^{1 \times d}$, $\arg \max(cg)$ is defined as the argument of the maximum $cg = \max_{1 \leq i \leq d}(c_i + g_i)$, and where A_k and B_k denote the k th rows of A and B , respectively.

The tangent cone $T(g, C)$ provides a local description of the cone C around g :

Proposition 2. *There exists a neighborhood N of g such that for all $x \in N$, x belongs to C if and only if it is an element of $g + T(g, C)$.*

As an illustration, Fig. 5 depicts the set $g^2 + T(g^2, C)$ (in semi-transparent light gray) when C is the cone given in Fig. 1. Both clearly coincide in the neighborhood of g^2 . Since extremality is a local property, it can be equivalently characterized in terms of the tangent cone. Let $\mathbf{1}$ be the element of $\mathbb{R}_{\max}^d$ whose all coordinates are equal to 1.

Proposition 3. *The element $\mathbf{g}$ is extreme in $\mathcal{C}$ if and only if the vector $\mathbf{1}$ is extreme in $\mathcal{T}(\mathbf{g}, \mathcal{C})$.*

The problem is now reduced to the characterization of the extremality of the vector $\mathbf{1}$ in a $\{0, 1\}$ -cone, i.e. defined by a system of the form $C\mathbf{x} \leq D\mathbf{x}$ where $C, D \in \{0, 1\}^{n \times d}$. The following proposition states that only $\{0, 1\}$ -vectors (i.e. elements of $\{0, 1\}^d$) have to be considered:

Proposition 4. *Let $\mathcal{D} \subset \mathbb{R}_{\max}^d$ be a cone defined by a system $C\mathbf{x} \leq D\mathbf{x}$ with $C, D \in \{0, 1\}^{n \times d}$. Then $\mathbf{1}$ is extreme of type t iff it is the unique element $\mathbf{x}$ of $\mathcal{D} \cap \{0, 1\}^d$ satisfying $\mathbf{x}_t = 1$.*

The following criterion of extremality is a direct consequence of Prop. 3 and 4:

Theorem 2. *Let $\mathcal{C} \subset \mathbb{R}_{\max}^d$ be a polyhedral cone. The element $\mathbf{g} \in \mathcal{C}$ is extreme of type t if and only if $\mathbf{1}$ is the unique $\{0, 1\}$ -element of the tangent cone $\mathcal{T}(\mathbf{g}, \mathcal{C})$ whose t -th coordinate is 1.*

Figure 6 shows that in our running example, the $\{0, 1\}$ -elements of $\mathcal{T}(\mathbf{g}^2, \mathcal{C})$ distinct from $\mathbf{1}$ (in squares) all satisfy $x_1 = 0$. Naturally, testing, by exploration, whether the set of 2^{d-1} $\{0, 1\}$ -elements $\mathbf{x}$ verifying $\mathbf{x}_t = 1$ belonging to $\mathcal{T}(\mathbf{g}, \mathcal{C})$ consists only of $\mathbf{1}$ does not have an acceptable complexity. Instead, we propose to use the equivalent formulation of the criterion of Th. 2:

$$\forall l \in \{1, \dots, d\}, [\forall \mathbf{x} \in \mathcal{T}(\mathbf{g}, \mathcal{C}) \cap \{0, 1\}^d, \mathbf{x}_l = 0 \implies \mathbf{x}_t = 0]. \quad (2)$$

Characterizing Extremality with Directed Hypergraphs. A directed hypergraph is a couple (N, E) such that each element of E is of the form (T, H) with $T, H \subset N$. The elements of N and E are respectively called *nodes* and *hyperedges*. Given a hyperedge $e = (T, H) \in E$, the sets T and H represent the *tail* and the *head* of e respectively, and are also denoted by $T(e)$ and $H(e)$. Figure 8 depicts an example of hypergraph whose nodes are u, v, w, x, y, t , and of hyperedges $e_1 = (\{u\}, \{v\})$, $e_2 = (\{v\}, \{w\})$, $e_3 = (\{w\}, \{u\})$, $e_4 = (\{v, w\}, \{x, y\})$, and $e_5 = (\{w, y\}, \{t\})$.

Reachability is extended from digraphs to directed hypergraphs by the following recursive definition: given $u, v \in N$, then v is *reachable from u in $\mathcal{H}$* , which is denoted $u \rightsquigarrow_{\mathcal{H}} v$, if $u = v$, or there exists $e \in E$ such that $v \in H(e)$ and all the elements of $T(e)$ are reachable from u . This induces a notion of *hyperpaths*, defined as a sequence of hyperedges of E , which can be empty if $u = v$, or of the form $e_1, \dots, e_p$ with $T(e_i) \subset \{u\} \cup H(e_1) \cup \dots \cup H(e_{i-1})$ for all $1 \leq i \leq p$, and $v \in H(e_p)$. In our example, t is reachable from u through the hyperpath e_1, e_2, e_4, e_5 .

The size of a hypergraph $\mathcal{H} = (N, E)$, denoted by $\text{size}(\mathcal{H})$, is defined as $|N| + \sum_{e \in E} (|T(e)| + |H(e)|)$. In the rest of the paper, directed hypergraphs will be simply referred to as hypergraphs.

We associate to the tangent cone $\mathcal{T}(\mathbf{g}, \mathcal{C})$ the hypergraph $\mathcal{H}(\mathbf{g}, \mathcal{C}) = (N, E)$ defined by:

$$N = \{1, \dots, d\} \quad E = \{(\arg \max(B_k \mathbf{g}), \arg \max(A_k \mathbf{g})) \mid A_k \mathbf{g} = B_k \mathbf{g}, 1 \leq k \leq n\}.$$

The extremality criterion of Eq. (2) suggests to evaluate, given an element of $\mathcal{T}(\mathbf{g}, \mathcal{C}) \cap \{0, 1\}^d$, the effect of setting its l -th coordinate to the other coordinates. Suppose that it has been discovered that $\mathbf{x}_l = 0$ implies $\mathbf{x}_{j_1} = \dots = \mathbf{x}_{j_n} = 0$. For any hyperedge e of $\mathcal{H}(\mathbf{g}, \mathcal{C})$ such that $T(e) \subset \{l, j_1, \dots, j_n\}$, $\mathbf{x}$ satisfies: $\max_{i \in H(e)} \mathbf{x}_i \leq \max_{j \in T(e)} \mathbf{x}_j = 0$, so that $\mathbf{x}_i = 0$ for all $i \in H(e)$. Thus, the propagation of the value 0 from the l -th coordinate to other coordinates mimicks the inductive definition of the reachability relation from the node l in $\mathcal{H}(\mathbf{g}, \mathcal{C})$:

Proposition 5. *For all $l \in \{1, \dots, d\}$, the statement given between brackets in Eq. (2) holds if and only if t is reachable from l in the hypergraph $\mathcal{H}(\mathbf{g}, \mathcal{C})$.*

Hence, the extremality criterion can be restated thanks to some considerations on the strongly connected components of $\mathcal{H}(\mathbf{g}, \mathcal{C})$. The *strongly connected components* (SCCs for short) of a hypergraph $\mathcal{H}$ are the equivalence classes of the equivalence relation $\equiv_{\mathcal{H}}$, defined by $u \equiv_{\mathcal{H}} v$ if $u \rightsquigarrow_{\mathcal{H}} v$ and $v \rightsquigarrow_{\mathcal{H}} u$. They form a partition of the set of nodes of $\mathcal{H}$. They can be partially ordered by the relation $\preceq_{\mathcal{H}}$, defined by $C_1 \preceq_{\mathcal{H}} C_2$ if C_1 and C_2 admit a representative u and v respectively such that $v \rightsquigarrow_{\mathcal{H}} u$ (beware of the order of v and u in $v \rightsquigarrow_{\mathcal{H}} u$). Then Prop. 5 and Th. 2 imply the following statement:

Theorem 3. *Let $\mathcal{C} \subset \mathbb{R}_{\max}^d$ be a polyhedral cone, and $\mathbf{g} \in \mathcal{C}$. Then $\mathbf{g}$ is extreme if and only if the set of the SCCs of the hypergraph $\mathcal{H}(\mathbf{g}, \mathcal{C})$, partially ordered by $\preceq_{\mathcal{H}(\mathbf{g}, \mathcal{C})}$, admits a least element.*

5 Determining the Minimal SCCs in Hypergraphs

Following Th. 3, we describe an algorithm which determines the minimal SCCs for the order $\preceq$ in hypergraphs. In particular, it returns the number of such SCCs, which is equal to 1 if and only if there exists a least SCC. Our approach is best understood by presenting first an instrumentation of Tarjan's algorithm [30] which applies only on directed graphs (*digraphs*), and has a linear time complexity. The order $\preceq$ can be defined on the SCCs of digraphs as well. Note that in a digraph (or in a hypergraph), a SCC is minimal for this order if and only if it has *no* leaving (hyper)edge (except those entering itself). Therefore, a SCC is a least element if and only if it is reachable from any other SCC. Besides, if $C_1 \preceq_G C_2$ in a digraph G , then C_1 is *greater* than or equal to C_2 in the topological order.

The algorithm for digraphs is given in Fig. 7 with the version of MINSCCCOUNT calling the visiting function GVISIT at Line 10 (parts highlighted in gray can be ignored). The array *index* tracks the order in which the nodes are visited: $index[u] = i$ if the node u is the i th one to be visited. The value $low[u]$ is used to determine the minimal index of the nodes which are reachable from u in the digraph. A SCC C is discovered as soon as a node u satisfies $low[u] = index[u]$ (Line 27). Then C consists of all the nodes stored in the stack S above u . The node u is the node of the SCC which has been visited first, and is called its *root*. The main difference between our algorithm and Tarjan's original one is that the nodes v are provided with a boolean $ismin[v]$ allowing to track the minimality of the SCC. A SCC is minimal if and only if its root u satisfies $ismin[u] = true$. In particular, the boolean $ismin[v]$ is set to *false* as soon as it is connected to a node w located in a distinct SCC (Line 21) or satisfying $ismin[w] = false$ (Line 24). The counter nb determines the number of minimal SCCs which have been discovered (see Line 28). For the sake of brevity, we have removed the operations allowing to return the SCCs. Instead, when a node is discovered to be in a SCC, it is placed in the set *Finished* (Line 30).

Nevertheless, this algorithm can not be applied on hypergraphs, since the reachability relation in the latter is much more complex. However, determining the minimal SCCs in digraphs can be helpful. First observe that a digraph $G(\mathcal{H}) = (N, E')$ can be associated to any hypergraph $\mathcal{H} = (N, E)$, by defining $E' = \{ (t, h) \mid (\{t\}, H) \in E \text{ and } h \in H \}$. The digraph $G(\mathcal{H})$ is generated by the *simple* hyperedges of $\mathcal{H}$, *i.e.* the elements $e \in E$ such that $|T(e)| = 1$. The minimal SCCs of $\mathcal{H}$ and $G(\mathcal{H})$ coincide in the following remarkable special case:

Proposition 6. *Let $\mathcal{H}$ be a hypergraph such that each minimal SCC of $G(\mathcal{H})$ is reduced to a singleton. Then $\mathcal{H}$ and $G(\mathcal{H})$ have the same minimal SCCs.*

If f is a function from N to an arbitrary set, we denote by $f(\mathcal{H})$ the hypergraph of nodes $f(N)$ and of hyperedges $\{ (f(T(e)), f(H(e))) \mid e \in E \}$. The following proposition ensures that, in a hypergraph, merging two nodes of a same SCC does not alter the reachability relation:

Proposition 7. *Let $\mathcal{H} = (N, E)$ be a hypergraph, and let $x, y \in N$ such that $x \equiv_{\mathcal{H}} y$. Consider the function f mapping any node distinct from x and y to itself, and both x and y to a same node z (with $z \notin N \setminus \{x, y\}$). Then $u \rightsquigarrow_{\mathcal{H}} v$ if and only if $f(u) \rightsquigarrow_{f(\mathcal{H})} f(v)$.*

Thus, the minimal SCCs of $\mathcal{H}$ and $f(\mathcal{H})$ are in one-to-one correspondence. Using Prop. 6 and 7, we now sketch a method which computes the minimal SCCs in a hypergraph $\mathcal{H}$: starting from the hypergraph $\mathcal{H}_{cur}$ image of $\mathcal{H}$ by the map $u \mapsto \{u\}$,

- (i) compute the minimal SCCs of the digraph $G(\mathcal{H}_{cur})$.
- (ii) if one of them, say C , is not reduced to a singleton, replace $\mathcal{H}_{cur}$ by $f(\mathcal{H}_{cur})$, where f merges all the elements U of C into the node $\bigcup_{U \in C} U$. Then go back to Step (i).
- (iii) otherwise, return the number of minimal SCCs of the digraph $G(\mathcal{H}_{cur})$.

Each time the *node merging step* (Step (ii)) is executed, new edges may appear in the digraph $G(\mathcal{H}_{cur})$. This situation is illustrated by Fig. 9. In both sides, the edges of $G(\mathcal{H}_{cur})$ are depicted in solid, and the non-simple hyperedges of $\mathcal{H}_{cur}$ in dotted line. The nodes of $\mathcal{H}_{cur}$ contain subsets of N , but enclosing braces are omitted. Applying Step (i) from node u (left side) discovers a

```

1: function MINSCCCOUNT( $N, E$ )
2:    $n := 0, nb := 0, S := [], Finished := \emptyset$ 
3:   for all  $e \in E$  do  $r_e := undef, c_e := 0$ 
4:   for all  $u \in N$  do
5:      $index[u] := undef, low[u] := undef$ 
6:      $F_u := [], MAKESET(u)$ 
7:   done
8:   for all  $u \in N$  do
9:     if  $index[u] = undef$  then
10:        $\begin{cases} GVISIT(u) & \triangleright \text{if } (N, E) \text{ is a digraph} \\ \text{or } HVISIT(u) & \triangleright \text{if it is a hypergraph} \end{cases}$ 
11:     end
12:   done
13:   return  $nb$ 
14: end

15: function GVISIT( $u$ )
16:    $index[u] := n, low[u] := n, n := n + 1$ 
17:    $ismin[u] := true$ , push  $u$  on the stack  $S$ 
18:   for all  $(u, w) \in E$  do
19:     if  $index[w] = undef$  then GVISIT( $w$ )
20:     if  $w \in Finished$  then
21:        $ismin[u] := false$ 
22:     else
23:        $low[w] := \min(low[u], low[w])$ 
24:        $ismin[u] := ismin[u] \&\& ismin[w]$ 
25:     end
26:   done
27:   if  $low[u] = index[u]$  then
28:     if  $ismin[u] = true$  then  $nb := nb + 1$ 
29:     repeat
30:       pop  $v$  from  $S$ , add  $v$  to  $Finished$ 
31:     until  $index[v] = index[u]$ 
32:   end
33: end

34: function HVISIT( $u$ )
35:   local  $U := FIND(u)$ , local  $F := []$ 
36:    $index[U] := n, low[U] := n, n := n + 1$ 
37:    $ismin[U] := true$ , push  $U$  on the stack  $S$ 
38:   for all  $e \in E_u$  do
39:     if  $|T(e)| = 1$  then push  $e$  on  $F$ 
40:   else
41:     if  $r_e = undef$  then  $r_e := u$ 
42:     local  $R_e := FIND(r_e)$ 
43:     if  $R_e$  appears in  $S$  then
44:        $c_e := c_e + 1$ 
45:       if  $c_e = |T(e)|$  then
46:         push  $e$  on the stack  $F_{R_e}$ 
47:       end
48:     end
49:   end
50:   done
51:   while  $F$  is not empty do
52:     pop  $e$  from  $F$ 
53:     for all  $w \in H(e)$  do
54:       local  $W := FIND(w)$ 
55:       if  $index[W] = undef$  then HVISIT( $w$ )
56:       if  $W \in Finished$  then
57:          $ismin[U] := false$ 
58:       else
59:          $low[W] := \min(low[U], low[W])$ 
60:          $ismin[U] := ismin[U] \&\& ismin[W]$ 
61:       end
62:     done
63:   done
64:   if  $low[U] = index[U]$  then
65:     if  $ismin[U] = true$  then  $\triangleright$  a minimal SCC is discovered
66:       local  $i := index[U]$ 
67:       pop each  $e$  from  $F_U$  and push it on  $F$ 
68:       pop  $V$  from  $S$ 
69:       while  $index[V] > i$  do
70:         pop each  $e$  from  $F_V$  and push it on  $F$ 
71:          $U := MERGE(U, V)$ 
72:         pop  $V$  from  $S$ 
73:       done
74:        $index[U] := i$ , push  $U$  on  $S$ 
75:       if  $F$  is not empty then go to Line 51
76:        $nb := nb + 1$ 
77:     end
78:   repeat
79:     pop  $V$  from  $S$ , add  $V$  to  $Finished$ 
80:   until  $index[V] = index[U]$ 
81: end
82: end

```

auxiliary data update step

Step (i)

Step (ii)

Fig. 7. Computing the minimal SCCs in hypergraphs

minimal SCC formed by u, v , and w in the digraph $G(\mathcal{H}_{cur})$. At Step (ii) (right side), the nodes are merged, and the hyperedge e_4 is transformed into two graph edges leaving the new node.

The termination of this method is ensured by the fact that the number of nodes in $\mathcal{H}_{cur}$ is strictly decreased each time Step (ii) is applied. When the method is terminated, minimal SCCs of $\mathcal{H}_{cur}$ are all reduced to single nodes, which contain subsets of N . Propositions 6 and 7 prove that these subsets are precisely the minimal SCCs of $\mathcal{H}$. Besides, the method returns the exact number of minimal SCCs in $\mathcal{H}$. However, in order for this approach to be efficient, the algorithm should avoid computing a same minimal SCC several times. For this reason, we propose to directly integrate the node merging step in our first algorithm on digraphs.

First observe that the nodes of the hypergraph $\mathcal{H}_{cur}$ always form a partition of the initial set N of nodes. Instead of referring to them as subsets of N , we use a union-find structure, which consists in three functions FIND, MERGE, and MAKESET (see *e.g.* [31, Chap. 21]):

- FIND(u) returns, for each original node $u \in N$, the unique node of $\mathcal{H}_{cur}$ containing u .
- two nodes U and V of $\mathcal{H}_{cur}$ can be merged by MERGE(U, V), which returns the new node.
- the “singleton” nodes $\{u\}$ of the initial $\mathcal{H}_{cur}$ are created by a function MAKESET.

With this structure, each node of $\mathcal{H}_{cur}$ is represented by an element $u \in N$, and then corresponds to the subset $\{v \in N \mid FIND(v) = u\}$. Nevertheless, we avoid confusion by denoting the nodes of the hypergraph $\mathcal{H}$ by lower case letters, and the nodes of $\mathcal{H}_{cur}$ by capital ones. By convention, if $u \in N$, FIND(u) will correspond to the associated capital letter U . Note that when an element $u \in N$ has never been merged with another one, it satisfies FIND(u) = u .




Fig. 8. A directed hypergraph

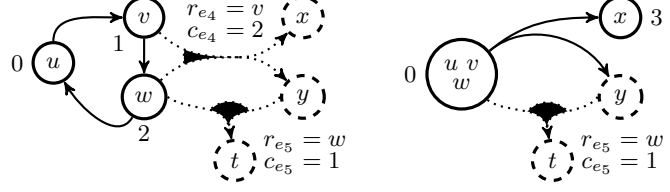


Fig. 9. A merging node step (the index of the visited nodes is given beside)

The resulting algorithm on hypergraphs is obtained by using the function `HVISIT` at Line 10. We present the main ideas used in the correctness proof of the algorithm, highlighting the differences with the first algorithm on digraphs. Albeit $\mathcal{H}_{cur}$ is not explicitly manipulated, it can always be inferred as the image of $\mathcal{H}$ by the function `FIND`. The visiting function `HVISIT(u)` computes the minimal SCCs reachable from the node `FIND(u)` in the digraph $G(\mathcal{H}_{cur})$, using the same method as in `GVISIT` (see the part corresponding to Step (i), from Lines 51 to 63). However, as soon as a minimal SCC is discovered, the node merging step (Step (ii)) is executed.

Node Merging Step. It is performed from Lines 66 to 75, when the node $U = \text{FIND}(u)$ is the root of a minimal SCC in $G(\mathcal{H}_{cur})$. All nodes V which have been discovered in that SCC are merged to U (Line 71). Let $\mathcal{H}_{new}$ be the resulting hypergraph. At Line 75, the stack F is supposed to contain the new edges of $G(\mathcal{H}_{new})$ leaving the newly “big” node U . If it is empty, $\{U\}$ is a minimal SCC of $G(\mathcal{H}_{new})$, hence also of $\mathcal{H}_{new}$ (Prop. 6). Thus nb is incremented. Otherwise, we go back to the beginning of Step (i) to discover minimal SCCs from the new U in $G(\mathcal{H}_{new})$.

Discovering the New Graph Edges. During the execution of `HVISIT(u)`, the local stack F is used to collect the hyperedges which represent edges leaving the node `FIND(u)` in the digraph $G(\mathcal{H}_{cur})$. When `HVISIT(u)` is called, `FIND(u)` is initially equal to u . The loop from Lines 38 to 50 iterates over the set E_u , which consists of the hyperedges $e \in E$ such that $u \in T(e)$. (The E_u can be built in linear time by traversing the set E before running `MINSCCCount`.) At the end of the loop, F is filled with all the simple hyperedges leaving $u = \text{FIND}(u)$ in $\mathcal{H}_{cur}$, as expected.

Now the main difficulty is to collect in F the edges which are added to the digraph $G(\mathcal{H}_{cur})$ after a node merging step, without examining all the non-simple hyperedges. To overcome this problem, each non-simple hyperedge $e \in E$ is provided with two auxiliary data: a counter $c_e \geq 0$, and a node r_e called its *root*. Invariants defining r_e and c_e are given in Fig. 10. Observe that at the call to `HVISIT(u)`, the counter c_e of each non-simple hyperedge $e \in E_u$ is incremented only when $R_e = \text{FIND}(r_e)$ belongs to the stack S (Line 44). This indeed holds if and only if `FIND(u)` is reachable from `FIND(r_e)` in the digraph $G(\mathcal{H}_{cur})$.

According to Fig. 10, when $c_e = |T(e)|$, all the nodes $X = \text{FIND}(x)$ (for $x \in T(e)$) are reachable from R_e in $G(\mathcal{H}_{cur})$. Now suppose that, later, it is discovered that R_e belongs to a minimal SCC of $G(\mathcal{H}_{cur})$. Then all the X stand in the same SCC. (Indeed, if C is a minimal SCC and $t \in C$, z is reachable from t if and only if $z \in C$.) Hence, when the node merging step is applied on this SCC, the X are merged into a single node U . In that case, the hyperedge e generates new simple edges leaving U in the new version of the digraph $G(\mathcal{H}_{cur})$. Now let us verify that e is correctly placed into F by our algorithm: as soon as c_e reaches the threshold $|T(e)|$, e is placed into a temporary stack F_{R_e} associated to the node R_e (Line 46). It is then emptied into F at Lines 67 or 70 during the node merging step.

For example, in the left side of Fig. 9, the execution of the loop from Lines 38 to 50 during the call to `HVISIT(v)` sets the root of the hyperedge e_4 to the node v , and c_{e_4} to 1. Then, during `HVISIT(w)`, c_{e_4} is incremented to $2 = |T(e_4)|$. The hyperedge e_4 is therefore pushed on the stack F_v (because $R_{e_4} = \text{FIND}(r_{e_4}) = \text{FIND}(v) = v$). Once it is discovered that u, v , and w form a

	nature	description
r_e	element of N or <i>undef</i>	first node x of $T(e)$ to be visited by a call to <code>HVISIT</code>
c_e	integer	number of elements $x \in T(e)$ such that $\text{index}[x]$ is defined, and <code>FIND(x)</code> is reachable from <code>FIND(r_e)</code> in the current graph $G(\mathcal{H}_{cur})$
F	stack local to <code>HVISIT(u)</code>	contain the hyperedges which represent edges leaving the node <code>FIND(u)</code> in $G(\mathcal{H}_{cur})$

Fig. 10. Invariants on auxiliary data in `HVISIT`

minimal SCC of $G(\mathcal{H}_{cur})$, e_4 is collected into F . It then allows to visit the node x from the new node (rightmost hypergraph). A fully detailed execution trace is provided in Appendix E.

Complexity. Using disjoint-set forests with union by rank and path compression as union-find structure (see [31, Chapter 21]), a sequence of p operations MAKESET, FIND, or MERGE can be performed in time $O(p \times \alpha(|N|))$, where α is the very slowly growing inverse of the map $x \mapsto A(x, x)$, and where A is the Ackermann function. Then the following statement holds:

Theorem 4. *Let $\mathcal{H} = (N, E)$ be a hypergraph. Then $\text{MINSCCCOUNT}(\mathcal{H})$ returns the number of minimal SCCs in $\mathcal{H}$ in time $O(\text{size}(\mathcal{H}) \times \alpha(|N|))$. Besides, the minimal SCCs are formed by the sets $\{v \in N \mid \text{FIND}(v) = U \text{ and } \text{ismin}[U] = \text{true}\}$.*

For any practical value of x , $\alpha(x) \leq 4$. That is why the complexity of MINSCCCOUNT is said to be *almost linear* in $\text{size}(\mathcal{H})$. Finally, our method does not allow to determine all SCCs, which is apparently a harder problem (see Appendix F for further details).

6 Resulting Algorithm and Experiments

Thanks to Th. 3, the equality test $\text{MINSCCCOUNT}(\mathcal{H}(\mathbf{h}, \mathcal{C})) = 1$ can be used to determine the extremality of $\mathbf{h}$ at Line 10 in COMPUTEEXTREME . Since the hypergraph $\mathcal{H}(\mathbf{h}, \mathcal{C})$ can be computed in time $O(nd)$, which is also the order of magnitude of its size, the complexity of each extremality test is $O(nd\alpha(d))$. Using the notations of Sect. 3, this represents an improvement factor of $O(|G|^2 / (n\alpha(d)))$ over the previous extremality test presented in Sect. 3. As discussed below and confirmed by the experiments, the size of G , which is the number of extreme rays in the intermediary cone $\mathcal{D}$, is much larger than $n\alpha(d)$ in general, so that the performance of COMPUTEEXTREME is significantly improved.

In classical geometry, the upper bound theorem of McMullen [32] shows that the maximal number of extreme points of a convex polytope in $\mathbb{R}^d$ defined by n inequality constraints is equal to $U(n, d) := \binom{n - \lfloor (d+1)/2 \rfloor}{n-d} + \binom{n - \lfloor (d+2)/2 \rfloor}{n-d}$. The *cyclic polytopes* (see [29]) are known to reach this bound. In the tropical setting, a recent work of Allamigeon, Gaubert, and Katz [33] proves that the number of extreme rays of a tropical polyhedral cone $\mathcal{C}$ in $\mathbb{R}_{\max}^d$ defined by n inequalities is bounded by similar quantity, $U(n+d, d-1)$. The latter is of an order of magnitude of $(n+d)^{d/2}$. Besides, natural candidates to be the maximizing cones, named *tropical signed cyclic polyhedral cones*, have been studied in [33]. While they asymptotically reach the bound $U(n+d, d-1)$ when $d \rightarrow +\infty$ and n is fixed, the bound does not seem to be attained in general. However, a lower bound on the number of extreme rays of signed cyclic polyhedral cones have been established for various cases: their order of magnitude are $O((n-2d)2^{d-2})$ when $n \geq 2d$, and $O(d^{d-n-1/2})$ when $d \geq 2n+1$. This confirms our previous statement on the size of G .

Like Motzkin's double description method [34, 35], the performance of COMPUTEEXTREME depends on the size of the sets returned in the intermediate steps. However, the complexity of the elementary step, *i.e.* the computation of the elements provided by Th. 1 and the elimination of non-extreme ones (Lines 7 to 13), can be precisely characterized: $O(nd\alpha(d) |G|^2)$. In comparison, the same step in the double description method relies on a combinatorial characterization of the adjacency of rays, of complexity $O(n |G|^3)$ [35]. As in general, the size of G is much larger than $d\alpha(d)$, the elementary step in our algorithm has a better complexity than its classical analogue.

A common point between our algorithm and Motzkin's approach is that the result provided by our algorithm does not depend on the order of the inequalities in the initial system. This order may impact the size of the intermediary sets and subsequently the execution time. In our experiments, inequalities are dynamically ordered during the execution: at each step of the induction, the inequality $\mathbf{a}\mathbf{x} \leq \mathbf{b}\mathbf{x}$ is chosen so as to minimize the number of combinations $(\mathbf{a}\mathbf{g}^j)\mathbf{g}^i \oplus (\mathbf{b}\mathbf{g}^i)\mathbf{g}^j$. Note that this strategy does not guarantee that the size of the intermediate sets of extreme elements is smaller. However, it reports better results than without ordering.

Benchmarks. The algorithm COMPUTEEXTREME has been implemented in a prototype written in OCaml. Table 1 reports some experiments for different classes of tropical cones: samples

Table 1. Execution time benchmarks on a single core of a 3 GHz Intel Xeon with 3 Gb RAM

	d	n	# final	# inter.	T (s)	T' (s)	T/T'
rnd100	12	15	32	59	0.24	6.72	0.035
rnd100	15	10	555	292	2.87	321.78	$8.9 \cdot 10^{-3}$
rnd100	15	18	152	211	6.26	899.21	$7.0 \cdot 10^{-3}$
rnd30	17	10	1484	627	15.2	4667.9	$3.3 \cdot 10^{-3}$
rnd10	20	8	5153	1273	49.8	50941.9	$9.7 \cdot 10^{-4}$
rnd10	25	5	3999	808	9.9	12177.0	$8.1 \cdot 10^{-4}$
rnd10	25	10	32699	6670	3015.7	—	—
cyclic	10	20	3296	887	25.8	4957.1	$5.2 \cdot 10^{-3}$
cyclic	15	7	2640	740	8.1	1672.2	$5.2 \cdot 10^{-3}$

	d	n	# final	# inter.	T (s)	T' (s)	T/T'
cyclic	17	8	4895	1589	44.8	25861.1	$1.7 \cdot 10^{-3}$
cyclic	20	8	28028	5101	690	> 10 days*	$< 8.0 \cdot 10^{-4}$
cyclic	25	5	25025	1983	62.6	> 8 days*	$< 9.1 \cdot 10^{-5}$
cyclic	30	5	61880	3804	261	—	—
cyclic	35	5	155040	7695	1232.6	—	—

	# var	# lines	T (s)	T' (s)	T/T'
oddeven8	17	118	7.6	152.1	0.050
oddeven9	19	214	128.0	22101.2	$5.8 \cdot 10^{-3}$
oddeven10	21	240	1049.0	—	—

formed by several cones chosen randomly (referred to as $\text{rnd}x$ where x is the size of the sample), and signed cyclic cones which are known to have a very large number of extreme elements. For each, the first columns respectively report the dimension d , the number of constraints n , the size of the final set of extreme rays, the mean size of the intermediary sets, and the execution time T (for samples of “random” cones, we give average results). We compare our algorithm with a variant using the extremality criterion which is discussed in Sect. 3 and used in the other existing implementations [23, 25]. Its execution time T' is given in the seventh column. The ratio T/T' shows that our algorithm brings a huge breakthrough in terms of execution time. When the number of extreme rays is of order of 10^4 , the second algorithm needs several days to terminate (the asterisk means that its execution was not terminated at the moment of the submission). Therefore, the comparison could not be made in practice for some cases.

Table 1 also reports some benchmarks from applications to static analysis. The experiments $\text{oddeven}i$ correspond to the static analysis of the odd-even sorting algorithm of i elements. It is a sort of worst case for our analysis. The number of variables and lines in each program is given in the first columns. The analyzer automatically shows that the sorting program returns an array in which the last (resp. first) element is the maximum (minimum) of the array given as input. It clearly benefits from the improvements of COMPUTEEXTREME, as shown by the ratio with the execution time T' of the previous implementation of the static analyzer [25].

7 Conclusion and Related Work

This work provides an efficient method to compute all extreme elements of tropical polyhedra and polyhedral cones. It is based on a successive elimination of inequalities, and a criterion to characterize extremality of elements by determining the existence of a SCC reachable from any other in a directed hypergraph, in almost linear time of its size. Existing approaches [20–22, 25] are also based on a successive inequality elimination technique, however their elementary step differs from the result of Th. 1, so that in practice, possibly more extremality tests are performed in their existing implementations [23, 25]. Besides, these tests rely on the method described in Sect. 3. As discussed in Sect. 6, they are consequently less efficient than our algorithm.

The algorithm MINSCCCOUNT is also a noteworthy contribution, since as far as we know, there is no method in the existing literature to determine minimal SCCs for the order $\preceq$, in linear (or almost) time in directed hypergraphs. Alternatively, we could have used Gallo’s *et al.* [36] linear algorithm to compute the set of reachable nodes from *each* node and obtain the whole reachability graph, but the total complexity would have been $O(|N| \text{size}(\mathcal{H}))$, *i.e.* a slowdown of almost a factor $|N|$.

We hope that our method can be considered as a tropical analogue of the very popular double description method of Motzkin, which is able to handle various kinds of convex polyhedra. Avis and Fukuda have developed a method which is polynomial for a subclass of *non-degenerate* polyhedra [37, 38]. As a future work, it would be very interesting to adapt it for a class of tropical polyhedra. This is a longer term objective, as tropical geometry is a young theory, and several difficulties still have to be overcome: for instance, the notion of faces is not yet well defined in the tropical setting (see [17] for a discussion). However, we believe that our characterization of extreme points in terms of directed hypergraphs is a first step towards understanding the combinatorics of tropical polyhedra, and will be helpful to develop further algorithms.

References

1. Zimmermann, K.: A general separation theorem in extremal algebras. *Ekonom.-Mat. Obzor* **13**(2) (1977) 179–201
2. Vorobyev, N.: Extremal algebra of positive matrices. *Elektron. Informationsverarbeitung und Kybernetik* **3** (1967) 39–71 in Russian.
3. Cuninghame-Green, R.A.: Minimax algebra. Volume 166 of *Lecture Notes in Economics and Mathematical Systems*. Springer-Verlag, Berlin (1979)
4. Litvinov, G., Maslov, V., Shpiz, G.: Idempotent functional analysis: an algebraic approach. *Math. Notes* **69**(5) (2001) 696–729
5. Maslov, V., Samborskiĭ, S., eds.: Idempotent analysis. Volume 13 of *Adv. in Sov. Math.* AMS, RI (1992)
6. Cohen, G., Gaubert, S., Quadrat, J.: Hahn-Banach separation theorem for max-plus semimodules. In Menaldi, J., Rofman, E., Sulem, A., eds.: *Optimal Control and Partial Differential Equations*. IOS Press (2001) 325–334
7. Cohen, G., Gaubert, S., Quadrat, J.P.: Duality and separation theorem in idempotent semimodules. *Linear Algebra and Appl.* **379** (2004) 395–422
8. Cohen, G., Gaubert, S., Quadrat, J.: Max-plus algebra and system theory: where we are and where to go now. *Annual Reviews in Control* **23** (1999) 207–219
9. Katz, R.D.: Max-plus (A, B) -invariant spaces and control of timed discrete event systems. *IEEE Trans. Aut. Control* **52**(2) (2007) 229–241
10. Di Loreto, M., Gaubert, S., Katz, R.D., Loiseau, J.J.: Duality between invariant spaces for max-plus linear discrete event systems. Eprint arXiv:0901.2915. (2009)
11. Cohen, G., Gaubert, S., Quadrat, J.P., Singer, I.: Max-plus convex sets and functions. In Litvinov, G.L., Maslov, V.P., eds.: *Idempotent Mathematics and Mathematical Physics*. Contemporary Mathematics. American Mathematical Society (2005) 105–129
12. Nitica, V., Singer, I.: Max-plus convex sets and max-plus semispaces. I. *Optimization* **56**(1–2) (2007) 171–205
13. Singer, I.: Abstract convex analysis. Wiley (1997)
14. Briec, W., Horvath, C.: $\mathbb{B}$ -convexity. *Optimization* **53** (2004) 103–127
15. Develin, M., Sturmfels, B.: Tropical convexity. *Doc. Math.* **9** (2004) 1–27 (electronic)
16. Joswig, M.: Tropical halfspaces. In: *Combinatorial and computational geometry*. Volume 52 of *Math. Sci. Res. Inst. Publ.* Cambridge Univ. Press, Cambridge (2005) 409–431
17. Develin, M., Yu, J.: Tropical polytopes and cellular resolutions. *Experimental Mathematics* **16**(3) (2007) 277–292
18. Joswig, M., Sturmfels, B., Yu, J.: Affine buildings and tropical convexity. *Albanian J. Math.* **1**(4) (2007) 187–211
19. Joswig, M.: Tropical convex hull computations (November 2008) Eprint arXiv:0809.4694, to appear in *Contemporary Mathematics*.
20. Butkovič, P., Hegedüs, G.: An elimination method for finding all solutions of the system of linear equations over an extremal algebra. *Ekonomicko-matematicky Obzor* **20** (1984)
21. Gaubert, S.: Théorie des systèmes linéaires dans les diodes. Thèse, École des Mines de Paris (July 1992)
22. Gaubert, S., Plus, M.: Methods and applications of $(\max, +)$ linear algebra. In Reischuk, R., Morvan, M., eds.: *STACS'97*. Number 1200 in *LNCS*, Lübeck, Springer (March 1997)
23. Cohen, G., Gaubert, S., McGettrick, M., Quadrat, J.P.: Maxplus toolbox of SCILAB. Available at <http://minimal.inria.fr/gaubert/maxplustoolbox/>; now integrated in SCICOSLAB. <http://www.scicoslab.org>
24. Gawrilow, E., Joswig, M.: POLYMAKE. <http://www.math.tu-berlin.de/polymake/>
25. Allamigeon, X., Gaubert, S., Goubault, E.: Inferring min and max invariants using max-plus polyhedra. In: *SAS'08*. Volume 5079 of *LNCS*. Springer, Valencia, Spain (2008) 189–204
26. Gaubert, S., Katz, R.: Max-plus convex geometry. In Schmidt, R.A., ed.: *RelMiCS/AKA 2006*. Volume 4136 of *Lecture Notes in Comput. Sci.* Springer (2006) 192–206
27. Gaubert, S., Katz, R.: The Minkowski theorem for max-plus convex sets. *Linear Algebra and Appl.* **421** (2007) 356–369
28. Butkovič, P., Schneider, H., Sergeev, S.: Generators, extremals and bases of max cones. *Linear Algebra Appl.* **421**(2–3) (2007) 394–406
29. Ziegler, G.M.: *Lectures on Polytopes*. Second edn. Springer-Verlag New York Inc. (1998)
30. Tarjan, R.: Depth-first search and linear graph algorithms. *SIAM Journal on Computing* **1**(2) (1972) 146–160
31. Cormen, T.H., Stein, C., Rivest, R.L., Leiserson, C.E.: *Introduction to Algorithms*. McGraw-Hill Higher Education (2001)
32. McMullen, P.: The maximum numbers of faces of a convex polytope. *Mathematika* **17** (1970) 179–184
33. Allamigeon, X., Gaubert, S., Katz, R.D.: The number of extreme points of tropical polyhedra. Eprint arXiv:math/0906.3492 (submitted) (2009)
34. Motzkin, T., Raiffa, H., Thompson, G., Thrall, R.: The double description method. In Kuhn, H., Tucker, A., eds.: *Contributions to the Theory of Games*. Volume II. (1953) 51–73
35. Fukuda, K., Prodon, A.: Double description method revisited. In: *Selected papers from the 8th Franco-Japanese and 4th Franco-Chinese Conference on Combinatorics and Computer Science*, London, UK, Springer-Verlag (1996) 91–111

- 36. Gallo, G., Longo, G., Pallottino, S., Nguyen, S.: Directed hypergraphs and applications. *Discrete Appl. Math.* **42**(2-3) (1993) 177–201
- 37. Avis, D., Fukuda, K.: A pivoting algorithm for convex hulls and vertex enumeration of arrangements and polyhedra. *Discrete Comput. Geom.* **8**(3) (1992) 295–313
- 38. Avis, D., Fukuda, K.: Reverse search for enumeration. *Discrete Appl. Math.* **65**(1-3) (1996) 21–46

A Proof of Th. 1

Let G' be the family of elements provided by Th. 1. The inclusion $\text{cone}(G') \subset \mathcal{C} \cap \mathcal{H}$ is obvious.

Now consider $\mathbf{x} \in \mathcal{C} \cap \mathcal{H}$. Suppose that $G = \{\mathbf{g}^1, \dots, \mathbf{g}^p\}$. Let $\lambda_1, \dots, \lambda_p \in \mathbb{R}_{\max}^d$ such that $\mathbf{x} = \bigoplus_{i=1}^p \lambda_i \mathbf{g}^i$. Observe that $\mathbf{a}\mathbf{x} \leq \mathbf{b}\mathbf{x}$ implies:

$$\bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i(\mathbf{a}\mathbf{g}^i) \oplus \bigoplus_{\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j} \lambda_j(\mathbf{a}\mathbf{g}^j) \leq \bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i(\mathbf{b}\mathbf{g}^i) \oplus \bigoplus_{\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j} \lambda_j(\mathbf{b}\mathbf{g}^j). \quad (3)$$

Suppose that $\bigoplus_{\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j} \lambda_j(\mathbf{b}\mathbf{g}^j) > \bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i(\mathbf{b}\mathbf{g}^i)$. Then there must be a k such that $\lambda_k(\mathbf{b}\mathbf{g}^k)$ is equal to $\bigoplus_{\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j} \lambda_j(\mathbf{b}\mathbf{g}^j)$, and necessarily $\lambda_k > 0$. But (3) leads to $\lambda_k(\mathbf{b}\mathbf{g}^k) \geq \lambda_k(\mathbf{a}\mathbf{g}^k)$ while $\mathbf{a}\mathbf{g}^k > \mathbf{b}\mathbf{g}^k$, which is a contradiction. It follows that $\bigoplus_{\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j} \lambda_j(\mathbf{b}\mathbf{g}^j) \leq \bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i(\mathbf{b}\mathbf{g}^i)$, so that, by (3),

$$\bigoplus_{\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j} \lambda_j(\mathbf{a}\mathbf{g}^j) \leq \bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i(\mathbf{b}\mathbf{g}^i). \quad (4)$$

Let κ be the right member of (4). If $\kappa > 0$, then

$$\begin{aligned} \mathbf{x} &= \bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i \mathbf{g}^i \oplus \bigoplus_{\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j} \lambda_j \mathbf{g}^j \\ &= \bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i \mathbf{g}^i \oplus \kappa^{-1} \bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \left[\bigoplus_{\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j} \lambda_j(\mathbf{a}\mathbf{g}^j) \right] \lambda_i \mathbf{g}^i \\ &\quad \oplus \kappa^{-1} \bigoplus_{\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j} \left[\bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i(\mathbf{b}\mathbf{g}^i) \right] \lambda_j \mathbf{g}^j \\ &= \bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i \mathbf{g}^i \oplus \kappa^{-1} \bigoplus_{\substack{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i \\ \mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j}} \lambda_i \lambda_j [(\mathbf{a}\mathbf{g}^j) \mathbf{g}^i \oplus (\mathbf{b}\mathbf{g}^i) \mathbf{g}^j] \end{aligned}$$

which shows $\mathbf{x} \in \text{cone}(G')$. Otherwise, $\kappa = 0$. By (4), $\lambda_j(\mathbf{a}\mathbf{g}^j) = 0$ for each j such that $\mathbf{a}\mathbf{g}^j > \mathbf{b}\mathbf{g}^j$, hence $\lambda_j = 0$. It follows that $\mathbf{x} = \bigoplus_{\mathbf{a}\mathbf{g}^i \leq \mathbf{b}\mathbf{g}^i} \lambda_i \mathbf{g}^i$, thus $\mathbf{x} \in \text{cone}(G')$. $\square$

B Proofs of the Statements in Sect. 4

This section also includes additional material which was only sketched in Sect. 4 for sake of brevity.

Proof (Prop. 1). If there exists $1 \leq t \leq d$ such that $\mathbf{g}$ is minimal in $\{\mathbf{x} \in \mathcal{C} \mid \mathbf{x}_t = \mathbf{g}_t\}$, then let $\mathbf{x}^1, \mathbf{x}^2 \in \mathcal{C}$ such that $\mathbf{g} = \mathbf{x}^1 \oplus \mathbf{x}^2$. In that case, for each $i \in \{1, 2\}$, $\mathbf{x}^i \leq \mathbf{g}$, and there is an i such that $\mathbf{x}_t^i = \mathbf{g}_t$, so that $\mathbf{x}^i = \mathbf{g}$.

Conversely, assume that for every index t , $\mathbf{g}$ is not minimal in the set $\{\mathbf{x} \in \mathcal{C} \mid \mathbf{x}_t = \mathbf{g}_t\}$, so that we can find a vector $\mathbf{x}^t$ such that $\mathbf{x}^t \leq \mathbf{g}$, $\mathbf{x}_t^t = \mathbf{g}_t$, and $\mathbf{x}^t \neq \mathbf{g}$. As a result, $\mathbf{g} = \mathbf{x}^1 \oplus \dots \oplus \mathbf{x}^d$. Since no $\mathbf{x}^t$ is equal to $\mathbf{g}$, this shows that $\mathbf{g}$ cannot be extreme. $\square$

The following proposition shows that extremality can be expressed as a local property.

Proposition 8. *Given a polyhedral cone $\mathcal{C} \subset \mathbb{R}_{\max}^d$, $\mathbf{g}$ is extreme of type t if and only if there exists a neighborhood V of $\mathbf{g}$ such that $\mathbf{g}$ is a minimal element of the set $\{\mathbf{x} \in \mathcal{C} \cap V \mid \mathbf{x}_t = \mathbf{g}_t\}$.*

Proof. If such a neighborhood V exists, let us consider $\mathbf{x} \in \mathcal{C}$ such that $\mathbf{x} \leq \mathbf{g}$ and $\mathbf{x}_t = \mathbf{g}_t$. Suppose that $\mathbf{x}$ is distinct from $\mathbf{g}$. Then any element of the form $\mathbf{y} = \mathbf{x} \oplus \alpha \mathbf{g}$ with $\alpha < 0$ also satisfies $\mathbf{y} \leq \mathbf{g}$, $\mathbf{y}_t = \mathbf{g}_t$, and $\mathbf{y} \neq \mathbf{g}$. Now, for α enough close to $\mathbf{g}$, $\mathbf{y}$ belongs to V , which contradicts the extremality of $\mathbf{g}$. $\square$

Lemma 1. *If $\mathbf{g} \neq \mathbf{0}$ is extreme of type t in a cone $\mathcal{C} \subset \mathbb{R}_{\max}^d$, then $\mathbf{g}_t \neq \mathbf{0}$.*

Proof. Suppose that $\mathbf{g}_t = \mathbf{0}$, and let $\mathbf{g}' = (-1)\mathbf{g}$. Then $\mathbf{g}' \in \mathcal{C}$, $\mathbf{g}' \leq \mathbf{g}$, and $\mathbf{g}' \neq \mathbf{g}$ since $\mathbf{g} \neq \mathbf{0}$. This is a contradiction with the extremality of type t of $\mathbf{g}$. $\square$

Given a subset I of $\{1, \dots, d\}$, let π_I be the function mapping any $\mathbf{x} \in \mathbb{R}_{\max}^d$ onto the element consisting of its coordinates $\mathbf{x}_i$ for each $i \in I$. Then the following proposition holds:

Proposition 9. *Let $\mathcal{C} \subset \mathbb{R}_{\max}^d$ be a polyhedral cone, and $\mathbf{g} \neq \mathbf{0}$ an element of $\mathcal{C}$ such that $\text{supp}(\mathbf{g}) = S$. Then the three following statements are equivalent:*

- (i) $\mathbf{g}$ is extreme in $\mathcal{C}$,
- (ii) $\mathbf{g}$ is extreme in $\{\mathbf{x} \in \mathcal{C} \mid \text{supp}(\mathbf{x}) \subset S\}$,
- (iii) $\pi_S(\mathbf{g})$ is extreme in $\pi_S(\{\mathbf{x} \in \mathcal{C} \mid \text{supp}(\mathbf{x}) \subset S\})$.

Proof. For sake of simplicity, we assume that $S = \{1, \dots, p\}$, where p is the cardinality of S . Let $\mathcal{D} := \{\mathbf{x} \in \mathcal{C} \mid \text{supp}(\mathbf{x}) \subset S\}$, $\mathcal{E} := \pi_S(\mathcal{D})$ and $\mathbf{h} := \pi_S(\mathbf{g})$.

- (i) $\Rightarrow$ (ii) Supposing $\mathbf{g}$ extreme in $\mathcal{C}$, $\mathbf{g}$ is obviously extreme in $\mathcal{D}$ since $\mathbf{g} \in \mathcal{D}$ and $\mathcal{D} \subset \mathcal{C}$.
- (ii) $\Rightarrow$ (iii) Now, suppose $\mathbf{g}$ extreme of type t in the cone $\mathcal{D}$. By Lemma 1, t belongs to S . Consider $\mathbf{y} \in \mathcal{E}$ such that $\mathbf{y} \leq \mathbf{h}$ and $\mathbf{y}_t = \mathbf{h}_t$. Let $\mathbf{x} \in \mathcal{D}$ such that $\mathbf{y} = \pi_S(\mathbf{x})$. Then $\mathbf{x} \leq \mathbf{g}$ and $\mathbf{x}_t = \mathbf{y}_t = \mathbf{h}_t = \mathbf{g}_t$. As a consequence, $\mathbf{x} = \mathbf{g}$, which implies $\mathbf{y} = \mathbf{h}$.
- (iii) $\Rightarrow$ (i) Finally, if $\mathbf{h}$ is extreme of type t in $\mathcal{E}$, let $\mathbf{x} \in \mathcal{C}$ such that $\mathbf{x} \leq \mathbf{g}$ and $\mathbf{x}_t = \mathbf{g}_t$. Then $\text{supp}(\mathbf{x}) \subset S$, hence $\mathbf{y} = \pi_S(\mathbf{x})$ satisfies $\mathbf{y} \in \mathcal{E}$, $\mathbf{y} \leq \mathbf{h}$ and $\mathbf{y}_t = \mathbf{h}_t$. This shows $\mathbf{y} = \mathbf{h}$, so that $\mathbf{x} = \mathbf{g}$. $\square$

This allows to suppose in Sect. 4 that $\text{supp}(\mathbf{g}) = \{1, \dots, d\}$ without loss of generality.

Proof (Prop. 2). Consider a neighborhood N in which all elements $\mathbf{x}$ satisfy the following conditions:

- $A_k \mathbf{x} < B_k \mathbf{x}$ for all k such that $A_k \mathbf{g} < B_k \mathbf{g}$,
- $\arg \max(A_k \mathbf{x}) \subset \arg \max(A_k \mathbf{g})$ and $\arg \max(B_k \mathbf{x}) \subset \arg \max(B_k \mathbf{g})$ for any other k .

Let $\mathbf{x} \in N$. Note that $\mathbf{x}$ belongs to $\mathcal{C}$ if and only if, for each k verifying $A_k \mathbf{g} = B_k \mathbf{g}$,

$$\max_{i \in \arg \max(A_k \mathbf{g})} (a_{ki} + \mathbf{x}_i) \leq \max_{j \in \arg \max(B_k \mathbf{g})} (b_{kj} + \mathbf{x}_j), \quad (5)$$

by definition of N .

Suppose that $\mathbf{x}$ belongs to $\mathcal{C}$. Let k such that $A_k \mathbf{g} = B_k \mathbf{g} > \mathbf{0}$. Since for all $i \in \arg \max(A_k \mathbf{g})$ and $j \in \arg \max(B_k \mathbf{g})$, $a_{ki} + \mathbf{g}_i = b_{kj} + \mathbf{g}_j > \mathbf{0}$, the term $a_{ki} + \mathbf{g}_i$ (resp. $b_{kj} + \mathbf{g}_j$) can be substracted from $a_{ki} + \mathbf{x}_i$ (resp. $b_{kj} + \mathbf{x}_j$) in (5), which shows:

$$\max_{i \in \arg \max(A_k \mathbf{g})} (\mathbf{x}_i - \mathbf{g}_i) \leq \max_{j \in \arg \max(B_k \mathbf{g})} (\mathbf{x}_j - \mathbf{g}_j). \quad (6)$$

Now, if $A_k \mathbf{g} = B_k \mathbf{g} = \mathbf{0}$, then $\arg \max(A_k \mathbf{g}) = \arg \max(B_k \mathbf{g}) = \{1, \dots, d\}$, hence (6) is a tautology.

Conversely, suppose that $\mathbf{x} - \mathbf{g}$ is an element of $\mathcal{T}(\mathbf{g}, \mathcal{C})$. Consider k such that $A_k \mathbf{g} = B_k \mathbf{g}$. Adding the term $a_{ki} + \mathbf{g}_i$ (resp. $b_{kj} + \mathbf{g}_j$) to each $\mathbf{x}_i - \mathbf{g}_i$ (resp. $\mathbf{x}_j - \mathbf{g}_j$) in (6) shows that $\mathbf{x}$ satisfies (5). $\square$

Proof (Prop. 3). Let N' be the set consisting of the elements $\mathbf{x} - \mathbf{g}$ for $\mathbf{x} \in N$, where N is given by Prop. 2. First remark that $\mathbf{g} \in \mathcal{C}$ if and only if $\mathbf{1} \in \mathcal{T}(\mathbf{g}, \mathcal{C})$.

Suppose that $\mathbf{g}$ is extreme of type t in the cone $\mathcal{C}$, and consider $\mathbf{y} \in \mathcal{T}(\mathbf{g}, \mathcal{C}) \cap N'$ such that $\mathbf{y} \leq \mathbf{1}$ and $\mathbf{y}_t = \mathbf{1}$. Let $\mathbf{x} = \mathbf{g} + \mathbf{y}$, then $\mathbf{x} \in \mathcal{C}$ by Prop. 2. Besides, $\mathbf{x} \leq \mathbf{g}$ and $\mathbf{x}_t = \mathbf{g}_t$, so

that $\mathbf{x} = \mathbf{g}$ and $\mathbf{y} = \mathbf{1}$. As N' is a neighborhood of $\mathbf{1}$, this proves that $\mathbf{1}$ is extreme of type t in $\mathcal{T}(\mathbf{g}, \mathcal{C})$ by Prop. 8.

Conversely, suppose that $\mathbf{1}$ is extreme of type t in $\mathcal{T}(\mathbf{g}, \mathcal{C})$. Let $\mathbf{x} \in \mathcal{C} \cap N$ verifying $\mathbf{x} \leq \mathbf{g}$ and $\mathbf{x}_t = \mathbf{g}_t$. If $\mathbf{y} = \mathbf{x} - \mathbf{g}$, then by Prop. 2 that $\mathbf{y}$ is an element of $\mathcal{T}(\mathbf{g}, \mathcal{C})$. Moreover, $\mathbf{y} \leq \mathbf{1}$ and $\mathbf{y}_t = \mathbf{1}$, so that $\mathbf{y} = \mathbf{1}$ and $\mathbf{x} = \mathbf{g}$. $\square$

Proof (Prop. 4). If $\mathbf{1}$ is extreme of type t , then it is minimal in the set $\{\mathbf{x} \in \mathcal{D} \mid \mathbf{x}_t = \mathbf{1}\}$, so that it is also minimal in $\{\mathbf{x} \in \mathcal{D} \cap \{0, \mathbf{1}\}^d \mid \mathbf{x}_t = \mathbf{1}\}$. It follows that the latter set is reduced to $\{\mathbf{1}\}$.

Conversely, consider $\mathbf{x} \in \mathcal{D}$ such that $\mathbf{x} \leq \mathbf{1}$ and $\mathbf{x}_t = \mathbf{1}$. Let $(\mathbf{x}^k)_{k \geq 1}$ be the sequence defined by $\mathbf{x}_i^k := k \times \mathbf{x}_i$. Since the coefficients of the matrices C and D are in the set $\{0, \mathbf{1}\}$, it is straightforward that each $\mathbf{x}^k$ belongs to $\mathcal{D}$. Moreover, the sequence $(\mathbf{x}^k)_{k \geq 1}$ obviously converges to an element $\mathbf{x}^\infty \in \{0, \mathbf{1}\}^d$, such that $\mathbf{x}^\infty \leq \mathbf{x}^k$ for all $k \geq 1$. It follows that $\mathbf{x}^\infty \leq \mathbf{1}$, and $\mathbf{x}_t^\infty = \mathbf{1}$. Besides, the cone $\mathcal{D}$ is closed, thus $\mathbf{x}^\infty \in \mathcal{D}$. This implies $\mathbf{x}^\infty = \mathbf{1}$ by assumption, which leads to $\mathbf{x} = \mathbf{1}$. $\square$

Proof (Th. 2). It is a direct consequence of Prop. 3, and of the application of Prop. 4 on the cone $\mathcal{T}(\mathbf{g}, \mathcal{C})$, which is indeed a $\{0, \mathbf{1}\}$ -cone. $\square$

Proposition 10. *Suppose that $\mathbf{g} \in \mathcal{C}$. Then $\mathbf{g}$ is extreme of type t if and only if the following statement holds for all $l \in \{1, \dots, d\}$:*

$$\forall \mathbf{x} \in \mathcal{T}(\mathbf{g}, \mathcal{C}) \cap \{0, \mathbf{1}\}^d, \mathbf{x}_l = 0 \implies \mathbf{x}_t = 0. \quad (7)$$

Proof. Suppose that $\mathbf{g}$ is extreme of type t . By Th. 2, $\mathbf{1}$ is the unique element of $\mathcal{T}(\mathbf{g}, \mathcal{C}) \cap \{0, \mathbf{1}\}^d$ whose t -th coordinate is $\mathbf{1}$. Let $l \in \{1, \dots, d\}$, and $\mathbf{x} \in \mathcal{T}(\mathbf{g}, \mathcal{C}) \cap \{0, \mathbf{1}\}^d$ such that $\mathbf{x}_l = 0$. Then $\mathbf{x} \neq \mathbf{1}$, so that $\mathbf{x}_t = 0$.

Conversely, since $\mathbf{g} \in \mathcal{C}$, then $\mathbf{1} \in \mathcal{T}(\mathbf{g}, \mathcal{C})$ by Prop. 2. Besides, consider $\mathbf{x} \in \mathcal{T}(\mathbf{g}, \mathcal{C}) \cap \{0, \mathbf{1}\}^d$ such that $\mathbf{x}_t = \mathbf{1}$. Then for all $l \in \{1, \dots, d\}$, $\mathbf{x}_l = \mathbf{1}$ by Eq. (7), so that $\mathbf{x} = \mathbf{1}$. This proves that $\mathbf{1}$ is the unique element of $\mathcal{T}(\mathbf{g}, \mathcal{C}) \cap \{0, \mathbf{1}\}^d$ whose t -th coordinate is $\mathbf{1}$, which implies that $\mathbf{g}$ is extreme of type t by Th. 2. $\square$

Proof (Prop. 5). Suppose that t is reachable from l in $\mathcal{H}(\mathbf{g}, \mathcal{C})$. Suppose that $\mathbf{x} \in \mathcal{T}(\mathbf{g}, \mathcal{C}) \cap \{0, \mathbf{1}\}^d$ such that $\mathbf{x}_l = 0$. Let us show by induction on the definition of the reachability in $\mathcal{H}(\mathbf{g}, \mathcal{C})$ that $\mathbf{x}_t = 0$:

- if $t = l$, then obviously $\mathbf{x}_t = 0$.
- otherwise, there exists a hyperedge e such that $t \in H(e)$ and for all $j \in T(e)$, j is reachable from l . By induction hypothesis, $\mathbf{x}_j = 0$. Let $A_k \mathbf{y} \leq B_k \mathbf{y}$ be the inequality associated to e . Then $\arg \max(A_k \mathbf{g}) = H(e)$ and $\arg \max(B_k \mathbf{g}) = T(e)$. Since $\mathbf{x}$ satisfies $\max_{i \in \arg \max(A_k \mathbf{g})} \mathbf{x}_i \leq \max_{j \in \arg \max(B_k \mathbf{g})} \mathbf{x}_j$, we have $\max_{i \in H(e)} \mathbf{x}_i \leq \max_{j \in T(e)} \mathbf{x}_j = 0$. Hence $\mathbf{x}_t = 0$, so that Eq. (2) holds.

Conversely, suppose t is not reachable from l . Let us define $\mathbf{x} = \mathbf{x}_i$ by $\mathbf{x}_i = 0$ if i is reachable from l , and $\mathbf{1}$ otherwise. Let $1 \leq k \leq n$ such that $A_k \mathbf{g} = B_k \mathbf{g}$. Let e be the associated hyperedge in $\mathcal{H}(\mathbf{g}, \mathcal{C})$. Remember that $\arg \max(A_k \mathbf{g}) = H(e)$ and $\arg \max(B_k \mathbf{g}) = T(e)$. If for all $j \in T(e)$, j is reachable from l , then all elements $i \in H(e)$ are also reachable from l , so that $\max_{i \in \arg \max(A_k \mathbf{g})} \mathbf{x}_i = \max_{j \in \arg \max(B_k \mathbf{g})} \mathbf{x}_j = 0$. Otherwise, there exists $j \in T(e)$ which is not reachable from l , so that $\max_{j \in \arg \max(B_k \mathbf{g})} \mathbf{x}_j = \mathbf{1}$. Since $\max_{i \in \arg \max(A_k \mathbf{g})} \mathbf{x}_i$ is always less than or equal to $\mathbf{1}$, the inequality $\max_{i \in \arg \max(A_k \mathbf{g})} \mathbf{x}_i \leq \max_{j \in \arg \max(B_k \mathbf{g})} \mathbf{x}_j$ holds. It follows that $\mathcal{T}(\mathbf{g}, \mathcal{C}) \cap \{0, \mathbf{1}\}^d$ admits an element $\mathbf{x}$ such that $\mathbf{x}_l = 0$ and $\mathbf{x}_t = \mathbf{1}$. $\square$

Proof (Th. 3). From Prop. 5 and 10, $\mathbf{g}$ is extreme of type t if and only if t is reachable from any node l of the hypergraph $\mathcal{H}(\mathbf{g}, \mathcal{C})$. This holds if and only if t belongs to a SCC C such that $C \preceq_{\mathcal{H}(\mathbf{g}, \mathcal{C})} D$ for any SCC D . As a consequence, $\mathbf{g}$ is extreme if and only if a least SCC exists. $\square$

C Proofs of Prop. 6 and 7

The reachability relation in a digraph G is denoted by $\rightsquigarrow_G$. We first introduce a lemma:

Lemma 2. *Let $\mathcal{H}$ be a directed hypergraph. Each SCC C of $\mathcal{H}$ is of the form $\cup_i C'_i$ where the C'_i are the SCCs of $G(\mathcal{H})$ such that $C \cap C'_i \neq \emptyset$.*

Proof. Formally, consider $u \in C$. Then there exists a SCC C' of $G(\mathcal{H})$ such that $u \in C'$ (since the SCCs of $G(\mathcal{H})$ form a partition of the set N), and obviously $C \cap C' \neq \emptyset$.

Conversely, suppose that C' is a SCC of $G(\mathcal{H})$ such that $C \cap C' \neq \emptyset$. Let $u \in C \cap C'$. Then for any $v \in C'$, $u \rightsquigarrow_{G(\mathcal{H})} v \rightsquigarrow_{G(\mathcal{H})} u$, so that $u \rightsquigarrow_{\mathcal{H}} v \rightsquigarrow_{\mathcal{H}} u$, hence $v \in C$. $\square$

Proof (Prop. 6). First suppose that $\{u\}$ is a minimal SCC of $G(\mathcal{H})$. Suppose that there exists $v \neq u$ such that $u \rightsquigarrow_{\mathcal{H}} v$. Consider a hyperpath $e_1, \dots, e_p$ from u to v in $\mathcal{H}$. Then there must be a hyperedge e_i such that $T(e_i) = \{u\}$ and $H(e_i) \neq \{u\}$ (otherwise, the hyperpath is a cycle and $v = u$). Let $w \in H(e_i) \setminus \{u\}$. Then (u, w) is an edge of $G(\mathcal{H})$. Since $\{u\}$ is a minimal SCC of $G(\mathcal{H})$, this enforces $w = u$, which is a contradiction. Hence $\{u\}$ is a minimal SCC of $\mathcal{H}$.

Conversely, consider a minimal SCC C of $\mathcal{H}$. Let $u \in C$, and let D be the SCC of $G(\mathcal{H})$ containing u . Consider D' a minimal SCC of $G(\mathcal{H})$ such that $D' \preceq_{G(\mathcal{H})} D$, and let C' be a SCC of $\mathcal{H}$ such that $D' \cap C' \neq \emptyset$. By Lemma 2, we have $D' \subset C'$. It follows that $C' \preceq_{\mathcal{H}} C$, hence $C = C'$ by minimality of C . Thus, $D' \subset C$, and since D' is a singleton, it also forms a SCC of $\mathcal{H}$ using the first part of the proof. This shows $D' = C$ (since the SCCs of $\mathcal{H}$ form a partition of the set of nodes), so that C is a minimal SCC of $G(\mathcal{H})$. $\square$

Proof (Prop. 7). Let $\mathcal{H}' = f(\mathcal{H})$. Suppose that $s \rightsquigarrow_{\mathcal{H}} t$. Observe that if X, Y are subsets of N , $f(X) \subset f(Y)$ as soon as $X \subset Y$, and $f(X \cup Y) \subset f(X) \cup f(Y)$. Therefore, if $e_1, \dots, e_p$ is a hyperpath from s to t , then:

$$\begin{aligned} T(e_i) &\subset \{s\} \cup H(e_1) \cup \dots \cup H(e_{i-1}) && \text{for all } 1 \leq i \leq p \\ t &\in H(e_p) \end{aligned}$$

so that:

$$\begin{aligned} f(T(e_i)) &\subset \{f(s)\} \cup f(H(e_1)) \cup \dots \cup f(H(e_{i-1})) && \text{for all } 1 \leq i \leq p \\ f(t) &\in f(H(e_p)) \end{aligned}$$

It follows that $f(s) \rightsquigarrow_{f(\mathcal{H})} f(t)$.

Conversely, suppose that $f(t)$ is reachable from $f(s)$ in $\mathcal{H}'$, and that $f(t) \neq f(s)$ (the case $f(t) = f(s)$ is trivial). Let $H_0 = \{s\}$ and $T_{p+1} = \{t\}$.

By definition, there exist $e_1 = (T_1, H_1), \dots, e_p = (T_p, H_p)$ in E such that for each $i \in \{1, \dots, p+1\}$, $f(T_i) \subset f(H_0) \cup \dots \cup f(H_{i-1})$.

Also note that for any $s \in \wp(N)$, $f(s) = s$ in $s \cap \{x, y\} = \emptyset$ and $f(s) = s \cup \{xy\} \setminus \{x, y\}$ otherwise. In particular, as soon as $xy \notin f(s)$, $f(s)$ coincides with s . Besides, $f(s) \setminus \{xy\} \subset s \subset f(s) \setminus \{xy\} \cup \{x, y\}$.

Two cases can be distinguished:

- (a) suppose that xy does not belong to any $f(H_j)$, so that $f(H_j) = H_j$. Similarly, for each $i \geq 1$, $f(T_i)$ does not contain xy , hence $f(T_i) = T_i$. Besides, $T_i \subset H_0 \cup \dots \cup H_{i-1}$ for each i , so that it is straightforward that $f(s) \rightsquigarrow_{\mathcal{H}'} f(t)$.
- (b) now, if xy is in one of the $f(H_j)$, let k be the smallest integer such that $xy \in f(H_k)$. Say for instance that $x \in H_k$. Let $(T'_1, H'_1), \dots, (T'_q, H'_q)$ be taken from a hyperpath from x to y in $\mathcal{H}$.

When $i \leq k$, $f(T_i)$ does not contain xy , hence $f(T_i) = T_i$ and $T_i \subset f(H_0) \cup \dots \cup f(H_{i-1}) = H_0 \cup \dots \cup H_{i-1}$.

```

1: function MINSCCCOUNT2( $N, E$ )
2:    $n := 0, nb := 0, S := [], Finished := \emptyset$ 
3:   for all  $e \in E$  do  $collected_e := false$ 
4:   for all  $u \in N$  do
5:      $index[u] := undef, low[u] := undef$ 
6:   MAKESET( $u$ )
7:   done
8:   for all  $u \in N$  do
9:     if  $low[u] = undef$  then HVISIT2( $u$ )
10:  done
11:  return  $nb$ 
12: end

13: function VISIT2( $u$ )
14:  local  $U := FIND(u)$ , local  $F := \emptyset$ 
15:   $index[U] := n, low[U] := n, n := n + 1$ 
16:   $ismin[U] := true$ , push  $U$  on the stack  $S$ 
17:  local  $no\_merge := true$ 
18:   $F := \{e \in E \mid T(e) = \{u\}\}$ 
19:  for all  $e \in F$  do  $collected_e := true$ 
20:  while  $F$  is not empty do
21:    pop  $e$  from  $F$ 
22:    for all  $w \in H(e)$  do
23:      local  $W := FIND(w)$ 
24:      if  $index[W] = undef$  then HVISIT2( $w$ )
25:      if  $W \in Finished$  then
26:         $ismin[U] := false$ 
27:      else
28:         $low[U] := \min(low[U], low[W])$ 
29:         $ismin[U] := ismin[U] \&\& ismin[W]$ 
30:      end
31:    done
32:  done

33: if  $low[U] = index[U]$  then
34:   if  $ismin[U] = true$  then
35:    local  $i := index[U]$ 
36:    pop  $V$  from  $S$ 
37:    while  $index[V] > i$  do
38:       $no\_merge := false$ 
39:       $U := MERGE(U, V)$ 
40:      pop  $V$  from  $S$ 
41:    done
42:    push  $U$  on  $S$ 
43:     $F := \left\{ e \in E \mid \begin{array}{l} collected_e = false \\ \text{and } \forall x \in T(e), FIND(x) = U \end{array} \right\}$ 
44:    for all  $e \in F$  do  $collected_e := true$ 
45:    if  $no\_merge = false$  then
46:       $n := i, index[U] := n, n := n + 1$ 
47:       $no\_merge := true$ , go to Line 20
48:    else
49:       $nb := nb + 1$ 
50:    end
51:  end
52:  repeat
53:    pop  $V$  from  $S$ , add  $V$  to  $Finished$ 
54:  until  $index[V] = index[U]$ 
55: end
56: end

```

Fig. 11. First intermediary form of our almost linear algorithm on hypergraphs

Besides, $T'_1 = \{x\} \subset H_0 \cup \dots \cup H_k$, and for each $i \in \{2, \dots, q\}$, $T'_i \subset H_0 \cup \dots \cup H_k \cup H'_1 \cup \dots \cup H'_{i-1}$ since $x \in H_k$.

Finally, let us prove for $i \geq k+1$ that $T_i \subset H_0 \cup \dots \cup H_k \cup H'_1 \cup \dots \cup H'_q \cup H_{k+1} \cup \dots \cup H_{i-1}$.

Clearly, $f(T_i) \setminus \{xy\} \subset \bigcup_{j=0}^{i-1} (f(H_j) \setminus \{xy\})$. Besides, $x \in H_k$ and $y \in H'_q$, and since T_i is included into $f(T_i) \setminus \{xy\} \cup \{x, y\}$, then T_i is also contained in $H_0 \cup \dots \cup H_k \cup H'_1 \cup \dots \cup H'_q \cup H_{k+1} \cup \dots \cup H_{i-1}$.

It follows that $(T_i, H_i)_{i=1, \dots, k}, (T'_i, H'_i)_{i=1, \dots, q}, (T_i, H_i)_{i=k+1, \dots, p}$ forms a hyperpath from s to t in $\mathcal{H}$. $\square$

D Proof of Th. 4

Theorem 4 contains two statements, a first one relative to the correctness of MINSCCCOUNT (*i.e.* it precisely computes the minimal SCCs), and a second one to its time complexity. We first focus on the first part.

D.1 Correctness of the Algorithm

The correctness proof of the algorithm MINSCCCOUNT turns out to be harder than the one of the classical Tarjan's algorithm, due to the complexity of the invariants which arise in the former algorithm. That is why we propose to show the correctness of two intermediary algorithms, named MINSCCCOUNT2 (Fig. 11) and MINSCCCOUNT3 (Fig. 12), and then to prove that they are equivalent to MINSCCCOUNT.

The main difference between the first intermediary form and MINSCCCOUNT is that it does not use auxiliary data associated to the hyperedges to determine which ones are added to the digraph $G(\mathcal{H}_{cur})$ after a node merging step. Instead, the stack F is directly filled with the right

hyperedges (Lines 18 and 43). Besides, a boolean *no_merge* is used to determine whether a node merging step has been executed. The notion of *node merging step* is refined: it now refers to the execution of the instructions between Lines 35 and 44 in which the boolean *no_merge* is set to *false*.

For sake of simplicity, we will suppose that sequences of assignment or stack manipulations are executed atomically. For instance, the sequences of instructions located in the blocks from Lines 14 and 19, or from Lines 35 and 44, and at from Lines 52 to 54, are considered as elementary instructions. Under this assumption, intermediate complex invariants do not have to be considered.

We first begin with very simple invariants:

Invariant 1. *Let U be a node of the current hypergraph $\mathcal{H}_{cur}$. Then $index[U]$ is defined if and only if $index[u]$ is defined for all $u \in N$ such that $FIND(u) = U$.*

Proof. It can be shown by induction on the number of node merging steps which has been performed on U .

In the basis case, there is a unique element $u \in N$ such that $FIND(u) = U$. Besides, $U = u$, so that the statement is trivial.

After a node merging step yielding the node U , we necessarily have $index[U] \neq undef$. Moreover, all the nodes V which has been merged into U satisfied $index[V] \neq undef$ because they were stored in the stack S . Applying the induction hypothesis terminates the proof. $\square$

Invariant 2. *Let $u \in N$. When $index[u]$ is defined, then $FIND(u)$ belongs either to the stack S , or to the set *Finished* (both cases can not happen simultaneously).*

Proof. Initially, $FIND(u) = u$, and once $index[u]$ is defined, $FIND(u)$ is pushed on S (Line 16). Naturally, $u \notin Finished$, because otherwise, $index[u]$ would have been defined before (see the condition Line 54). After that, $U = FIND(u)$ can be popped from S at three possible locations:

- at Lines 36 or 40, in which case U is transformed into a node U' which is immediately pushed on the stack S at Line 42. Since after that, $FIND(u) = U'$, the property $FIND(u) \in S$ still holds.
- at Line 53, in which case it is directly appended to the set *Finished*. $\square$

Invariant 3. *The set *Finished* is always growing.*

Proof. Once an element is added to *Finished*, it is never removed from it nor merged into another node (the function *MERGE* is always called on elements immediately popped from the stack S). $\square$

Proposition 11. *The function $MINSCCCount2(\mathcal{H})$ returns the number of minimal SCC of $\mathcal{H}$. Besides, the minimal SCCs are formed by the sets $\{v \in N \mid FIND(v) = U \text{ and } ismin[U] = true\}$.*

Proof. We prove the whole statement by induction on the number of node merging steps.

Basis Case. First, suppose that the hypergraph $\mathcal{H}$ is such that no nodes are merged during the execution of $MINSCCCount2(\mathcal{H})$, i.e. the node merging loop (from Lines 37 to 41) is never executed. Then the boolean *no_merge* is always set to *true*, so that n is never redefined to $i + 1$ (Line 46), and there is no back edge to Line 20 in the control-flow graph. It follows that removing all the lines between Lines 35 to 47 does not change the behavior of the algorithm. Besides, since the function *MERGE* is never called, $FIND(u)$ always coincides with u . Finally, at Line 18, F is precisely assigned to the set of simple hyperedges leaving u in $\mathcal{H}$, so that the loop from Lines 20 to 32 iterates on the successors of u in $G(\mathcal{H})$. As a consequence, the algorithm $MINSCCCount2(\mathcal{H})$ behaves exactly like $MINSCCCount(G(\mathcal{H}))$. Moreover, under our assumption, the minimal SCCs of $G(\mathcal{H})$ are all reduced to singletons (otherwise, the loop from Lines 37 to 41 would be executed, and some nodes would be merged). Therefore, by Prop. 6, the statement in Prop. 11 holds.

Inductive Case. Now suppose that the node merging loop is executed at least once, and that its first execution happens during the execution of, say, $\text{HVISIT2}(x)$. Consider the state of the algorithm at Line 35 just before the execution of the first occurrence of the node merging step. Until that point, $\text{FIND}(v)$ is still equal to v for all node $v \in N$, so that the execution of $\text{MINSCCCOUNT}(\mathcal{H})$ coincides with the execution of $\text{MINSCCCOUNT}(G(\mathcal{H}))$. Consequently, if C is the set formed by the nodes y located above x in the stack S (including x), C forms a minimal SCC of $G(\mathcal{H})$. In particular, the elements of C are located in a same SCC of the hypergraph $\mathcal{H}$.

Consider the hypergraph $\mathcal{H}'$ obtained by merging the elements of C in the hypergraph $(N, E \setminus \{e \mid \exists y \in C \text{ s.t. } T(e) = \{y\}\})$, and let X be the resulting node. For now, we may add a hypergraph as last argument of the functions HVISIT2 , FIND , ... to distinguish their execution in the context of the call to $\text{MINSCCCOUNT2}(\mathcal{H})$ or $\text{MINSCCCOUNT2}(\mathcal{H}')$. We make the following observations:

- the node x is the first element of C to be visited during the execution of $\text{MINSCCCOUNT2}(\mathcal{H})$. It follows that the execution of $\text{MINSCCCOUNT2}(\mathcal{H})$ until the call to $\text{HVISIT2}(x, \mathcal{H})$ coincides with the execution of $\text{MINSCCCOUNT2}(\mathcal{H}')$ until the call to $\text{HVISIT2}(X, \mathcal{H}')$.
- besides, during the execution of $\text{HVISIT2}(x, \mathcal{H})$, the execution of the loop from Lines 20 to 32 only has a local impact, *i.e.* on the $\text{ismin}[y]$, $\text{index}[y]$, or $\text{low}[y]$ for $y \in C$, and not on nb or any information relative to other nodes. Indeed, we claim that the set of the nodes y on which HVISIT2 is called during the execution of the loop is exactly $C \setminus \{x\}$. First, for all $y \in C \setminus \{x\}$, $\text{HVISIT2}(y)$ has necessarily been executed *after* Line 20 (otherwise, by Inv. 2, y would be either below x in the stack S , or in *Finished*). Conversely, suppose that after Line 20, there is a call to $\text{HVISIT2}(t)$ with $t \notin C$. By Inv. 2, t belongs to *Finished*, so that for one of the nodes w examined in the loop, either $w \in \text{Finished}$ or $\text{ismin}[w] = \text{false}$ after the call to $\text{HVISIT2}(w)$. Hence $\text{ismin}[x]$ should be *false*, which contradicts our assumptions.
- finally, from the execution of Line 47 during the call to $\text{HVISIT2}(x, \mathcal{H})$, our algorithm behaves exactly as $\text{MINSCCCOUNT2}(\mathcal{H}')$ from the execution of Line 20 in $\text{HVISIT2}(X, \mathcal{H}')$. Indeed, $\text{index}[X]$ is equal to i , and the latter is equal to $n - 1$. Similarly, for all $y \in C$, $\text{low}[y] = i$ and $\text{ismin}[y] = \text{true}$. The node X being equal to one of the $y \in C$, we also have $\text{low}[X] = i$ and $\text{ismin}[X] = \text{true}$. Moreover, X is the top element of S .

Furthermore, it can be verified that at Line 43, the set F contains exactly all the hyperedges of E which generate the simple hyperedges leaving X in $\mathcal{H}'$: they are exactly characterized by

$$\begin{aligned} & \text{FIND}(z, \mathcal{H}) = X \text{ for all } z \in T(e), \text{ and } T(e) \neq \{y\} \text{ for all } y \in C \\ \iff & \text{FIND}(z, \mathcal{H}) = X \text{ for all } z \in T(e), \text{ and } \text{collected}_e = \text{false} \end{aligned}$$

since at that Line 43, a hyperedge e satisfies $\text{collected}_e = \text{true}$ if and only if $T(e)$ is reduced to a singleton $\{t\}$ such that $\text{index}[t]$ is defined.

Finally, for all $y \in C$, $\text{FIND}(y, \mathcal{H})$ can be equivalently replaced by $\text{FIND}(X, \mathcal{H}')$.

As a consequence, $\text{MINSCCCOUNT2}(\mathcal{H})$ returns the same result as $\text{MINSCCCOUNT2}(\mathcal{H}')$. Besides, both functions perform the same union-find operations, except the first the node merging step executed by $\text{MINSCCCOUNT2}(\mathcal{H})$ on C .

Let f be the function which maps all nodes $y \in C$ to X , and any other node to itself. We claim that $\mathcal{H}'$ and $f(\mathcal{H})$ have the same reachability graph, *i.e.* $\rightsquigarrow_{\mathcal{H}'}$ and $\rightsquigarrow_{f(\mathcal{H})}$ are identical relations. Indeed, the two hypergraphs only differ on the images of the hyperedges $e \in E$ such that $T(e) = \{y\}$ for some $y \in C$. For such hyperedges, we have $H(e) \subset C$, because otherwise, $\text{ismin}[x]$ would have been set to *false* (*i.e.* the SCC C would not be minimal). It follows that their are mapped to the cycle $(\{X\}, \{X\})$ by f , so that $\mathcal{H}'$ and $f(\mathcal{H})$ clearly have the same reachability graph. In particular, they have the same minimal SCCs.

```

1: function MINSCCCOUNT3( $N, E$ )
2:    $n := 0, nb := 0, S := [], Finished := \emptyset$ 
3:   for all  $e \in E$  do
4:      $r_e := undef, c_e := 0$ 
5:      $collected_e := false$ 
6:   done
7:   for all  $u \in N$  do
8:      $index[u] := undef, low[u] := undef$ 
9:     MAKESET( $u$ ),  $F_u := []$ 
10:  done
11:  for all  $u \in N$  do
12:    if  $index[u] = undef$  then HVISIT3( $u$ )
13:  done
14:  return  $nb$ 
15: end

16: function VISIT3( $u$ )
17:   local  $U := \text{FIND}(u)$ , local  $F := []$ 
18:    $index[U] := n, low[U] := n, n := n + 1$ 
19:    $ismin[U] := true$ , push  $U$  on the stack  $S$ 
20:   for all  $e \in E_u$  do
21:     if  $|T(e)| = 1$  then push  $e$  on  $F$ 
22:   else
23:     if  $r_e = undef$  then  $r_e := u$ 
24:     local  $R_e := \text{FIND}(r_e)$ 
25:     if  $R_e$  appears in  $S$  then
26:        $c_e := c_e + 1$ 
27:       if  $c_e = |T(e)|$  then
28:         push  $e$  on the stack  $F_{R_e}$ 
29:       end
30:     end
31:   end
32: done
33: for all  $e \in F$  do  $collected_e := true$ 

34: while  $F$  is not empty do
35:   pop  $e$  from  $F$ 
36:   for all  $w \in H(e)$  do
37:     local  $W := \text{FIND}(w)$ 
38:     if  $low[W] = undef$  then HVISIT( $w$ )
39:     if  $W \in Finished$  then
40:        $ismin[U] := false$ 
41:     else
42:        $low[U] := \min(low[U], low[W])$ 
43:        $ismin[U] := ismin[U] \&\& ismin[W]$ 
44:     end
45:   done
46: done
47: if  $low[U] = index[U]$  then
48:   if  $ismin[U] = true$  then
49:     local  $i := index[U]$ 
50:     pop each  $e \in F_U$  and push it on  $F$ 
51:     pop  $V$  from  $S$ 
52:     while  $index[V] > i$  do
53:       pop each  $e \in F_V$  and push it on  $F$ 
54:        $U := \text{MERGE}(U, V)$ 
55:       pop  $V$  from  $S$ 
56:     done
57:      $index[U] := i$ , push  $U$  on  $S$ 
58:      $F := \left\{ e \in E \mid \begin{array}{l} collected_e = false \\ \text{and } \forall x \in T(e), \text{FIND}(x) = U \end{array} \right\}$ 
59:     for all  $e \in F$  do  $collected_e := true$ 
60:     if  $F \neq \emptyset$  then go to Line 34
61:      $nb := nb + 1$ 
62:   end
63:   repeat
64:     pop  $V$  from  $S$ , add  $V$  to  $Finished$ 
65:   until  $index[V] = index[U]$ 
66: end
67: end

```

Fig. 12. Second intermediary form of our linear algorithm on hypergraphs

Finally, since the elements of C are in a same SCC of $\mathcal{H}$, Prop. 7 shows that the function f induces a one-to-one correspondence between the SCCs of $\mathcal{H}$ and the SCCs of $f(\mathcal{H})$.

$$\begin{aligned}
D &\longmapsto f(D) \\
(D' \setminus \{X\}) \cup C &\longleftarrow D' && \text{if } X \in D' \\
D' &\longleftarrow D' && \text{otherwise.}
\end{aligned}$$

The action of the function f exactly corresponds to the node merging step performed on C . Since by induction hypothesis, MINSCCCOUNT2($\mathcal{H}'$) determines the minimal SCCs in $f(\mathcal{H})$, it follows that Prop. 11 holds. $\square$

The second intermediary version of our algorithm, MINSCCCOUNT3, is based on the first one, but it performs the same computations on the auxiliary data r_e and c_e as in MINSCCCOUNT. However, the latter are never used, because at Line 58, F is re-assigned to the value provided in MINSCCCOUNT2. It follows that for now, the parts in gray can be ignored. The following lemma states that MINSCCCOUNT2 and MINSCCCOUNT3 are equivalent:

Proposition 12. *Let $\mathcal{H}$ be a hypergraph. Then MINSCCCOUNT3($\mathcal{H}$) returns the number of minimal SCC of $\mathcal{H}$. Besides, the minimal SCCs are formed by the sets $\{v \in N \mid \text{FIND}(v) = U \text{ and } ismin[U] = true\}$.*

Proof. When HVISIT3(u) is executed, the local stack F is not directly assigned to the set $\{e \in E \mid T(e) = \{u\}\}$ (see Line 18 in Fig. 11), but built by several iterations on the set E_u (Line 21). Since $u \in T(e)$ and $|T(e)| = 1$ holds if and only if $T(e)$ is reduced to $\{u\}$, HVISIT3(u) initially fills F with the same hyperedges as HVISIT2(u).

Besides, the condition $no_merge = false$ in HVISIT2 (Line 45) is replaced by $F \neq \emptyset$ (Line 60). We claim that the condition $F \neq \emptyset$ can be safely used in HVISIT2 as well. Indeed, in HVISIT2, $F \neq \emptyset$ implies $no_merge = false$. Conversely, suppose that in HVISIT2, $no_merge = false$ and $F = \emptyset$, so that the algorithm goes back to Line 47 after having no_merge to $true$. The loop from Lines 20 to 32 is not executed since $F = \emptyset$, and it directly leads to a new execution of Lines 33 to 45 with $no_merge = true$. Therefore, going back to Line 47 was useless.

Finally, during the node merging step in HVISIT3, n keeps its value, which is greater than or equal to $i + 1$, but is not necessarily equal to $i + 1$ like in HVISIT2 (just after Line 46). This is safe because the whole algorithm only need that n take increasing values, and not necessarily consecutive ones.

We conclude by applying Prop. 11. $\square$

We make similar assumptions on the atomicity of the sequences of instructions. Note that Inv. 1, 2, and 3 still holds in HVISIT3.

Invariant 4. *Let $e \in E$ such that $|T(e)| > 1$. If for all $x \in T(e)$, $index[x]$ is defined, then the root r_e is defined.*

Proof. For all $x \in T(e)$, HVISIT3(x) has been called. The root r_e has necessarily been defined at the first of these calls (remember that the block from Lines 17 to 33 is supposed to be executed atomically). $\square$

Invariant 5. *Consider a state cur of the algorithm in which $U \in Finished$. Then any node reachable from U in $G(\mathcal{H}_{cur})$ is also in $Finished$.*

Proof. The invariant clearly holds when U is placed in $Finished$. Using the atomicity assumptions, the call to HVISIT3(u) is necessarily terminated. Let old be the state of the algorithm at that point, and $\mathcal{H}_{old}$ and $Finished_{old}$ the corresponding hypergraph and set of terminated nodes at that state respectively. Since HVISIT3(u) has performed a depth-first search from the node U in $G(\mathcal{H}_{old})$, all the nodes reachable from U in $\mathcal{H}_{old}$ stand in $Finished_{old}$.

We claim that the invariant is then preserved by the following node merging steps. The graph edges which may be added by the latter leave nodes in S , and consequently not from elements in $Finished$ (by Inv. 2). It follows that the set of reachable nodes from elements of $Finished_{old}$ is not changed by future node merging steps. As a result, *all the nodes reachable from U in $G(\mathcal{H}_{cur})$ are elements of $Finished_{old}$* . Since by Inv. 5, $Finished_{old} \subset Finished$, this proves the whole invariant in the state cur . $\square$

Invariant 6. *In the digraph $G(\mathcal{H}_{cur})$, at the call to HVISIT3(u), u is reachable from a node W such that $index[W]$ is defined if and only if W belongs to the stack S .*

Proof. The “if” part can be shown by induction. When the function HVISIT3(u) is called from Line 12, the stack S is empty, so that this is obvious. Otherwise, it is called from Line 38 during the execution of HVISIT3(x). Then $X = \text{FIND}(x)$ is reachable from any node in the stack, since x was itself reachable from any node in the stack at the call to $\text{FIND}(X)$ (inductive hypothesis) and that this reachability property is preserved by potential node merging steps (Prop. 7). As u is obviously reachable from X , this shows the statement.

Conversely, suppose that $index[W]$ is defined, and W is not in the stack. According to Inv. 2, W is necessarily an element of $Finished$. Hence u also belongs to $Finished$ by Inv. 5, which is a contradiction since this can not hold at the call to HVISIT(u). $\square$

Invariant 7. *Let $e \in E$ such that $|T(e)| > 1$. Consider a state cur of the algorithm MINSCC-COUNT3 in which r_e is defined.*

Then c_e is equal to the number of elements $x \in T(e)$ such that $index[x]$ is defined and $\text{FIND}(x)$ is reachable from $\text{FIND}(r_e)$ in $G(\mathcal{H}_{cur})$.

Proof. Since at Line 26, c_e is incremented only if $R_e = \text{FIND}(r_e)$ belongs to S , we already know using Inv. 6 that c_e is equal to the number of elements $x \in T(e)$ such that, at the call to $\text{HVISIT3}(x)$, x was reachable from $\text{FIND}(r_e)$.

Now, let $x \in N$, and consider a state cur of the algorithm in which r_e and $\text{index}[x]$ are both defined, and $\text{FIND}(r_e)$ appears in the stack S . Since $\text{index}[x]$ is defined, HVISIT3 has been called on x , and let old be the state of the algorithm at that point. Let us denote by $\mathcal{H}_{old}$ and $\mathcal{H}_{cur}$ the current hypergraphs at the states old and cur respectively. Like previously, we may add a hypergraph as last argument of the function FIND to distinguish its execution in the states old and cur . We claim that $\text{FIND}(r_e, \mathcal{H}_{cur}) \rightsquigarrow_{G(\mathcal{H}_{cur})} \text{FIND}(x, \mathcal{H}_{cur})$ if and only if $\text{FIND}(r_e, \mathcal{H}_{old}) \rightsquigarrow_{G(\mathcal{H}_{old})} x$. The “if” part is due to the fact that reachability in $G(\mathcal{H}_{old})$ is not altered by the node merging steps (Prop. 7). Conversely, if x is not reachable from $\text{FIND}(r_e, \mathcal{H}_{old})$ in $\mathcal{H}_{old}$, then $\text{FIND}(r_e, \mathcal{H}_{old})$ is not in the call stack S_{old} (Invariant 6), so that it is an element of Finished_{old} . But $\text{Finished}_{old} \subset \text{Finished}_{cur}$, which contradicts our assumption since by Inv. 2, an element can not be stored in Finished_{cur} and S_{cur} at the same time. It follows that if r_e is defined and $\text{FIND}(r_e)$ appears in the stack S , c_e is equal to the number of elements $x \in T(e)$ such that $\text{index}[x]$ is defined and $\text{FIND}(r_e) \rightsquigarrow_{G(\mathcal{H}_{cur})} \text{FIND}(x)$.

Let cur be the state of the algorithm when $\text{FIND}(r_e)$ is moved from S to Finished . The invariant still holds. Besides, in the future states new , c_e is not incremented because $\text{FIND}(r_e, \mathcal{H}_{cur}) \in \text{Finished}_{cur} \subset \text{Finished}_{new}$ (Inv. 3), so that $\text{FIND}(r_e, \mathcal{H}_{new}) = \text{FIND}(r_e, \mathcal{H}_{cur})$, and the latter can not appear in the stack S_{new} (Inv. 2). Furthermore, any node reachable from $R_e = \text{FIND}(r_e, \mathcal{H}_{new})$ in $G(\mathcal{H}_{new})$ belongs to Finished_{new} (Inv. 5). It even belongs to Finished_{cur} , as shown in the second part of the proof of Inv. 5 (emphasized sentence). It follows that the number of reachable nodes from $\text{FIND}(r_e)$ has not changed between states cur and new . Therefore, the invariant on c_e will be preserved, which completes the proof. $\square$

Proposition 13. *In HVISIT3, the assignment at Line 58 does not change the value of F .*

Proof. It can be shown by strong induction on the number p of times that this line has been executed. Suppose that we are currently at Line 49, and let $X_1, \dots, X_q$ be the elements of the stack located above the root $U = X_1$ of the minimal SCC of $G(\mathcal{H}_{cur})$. Any edge e which will be transferred to F from Line 49 to Line 56 satisfies $c_e = |T(e)| > 1$ and $\text{FIND}(r_e) = X_i$ for some $1 \leq i \leq q$ (since at 49, F is initially empty). Invariant 7 implies that for all elements $x \in T(e)$, $\text{FIND}(x)$ is reachable from X_i in $G(\mathcal{H}_{cur})$, so that by minimality of the SCC $C = \{X_1, \dots, X_q\}$, $\text{FIND}(x)$ belongs to C , i.e. there exists j_1 such that $\text{FIND}(x) = X_{j_1}$. It follows that at Line 56, $\text{FIND}(x) = U$ for all $x \in T(e)$. Then, we claim that $\text{collected}_e = \text{false}$ at Line 56. Indeed, $e' \in E$ satisfies $\text{collected}_{e'} = \text{true}$ if and only if

- either it has been copied to F at Line 21, in which case $|T(e')| = 1$,
- or if it has been copied to F at the r -th execution of Line 58, with $r < p$. By induction hypothesis, this means that e' has been pushed on a stack F_X and then popped from it strictly before the r -th execution of Line 58.

Observe that a given hyperedge can be popped from a stack F_x at most once during the whole execution of $\text{MINSCC}\text{COUNT3}$. Here, e has been popped from F_{X_i} after the p -th execution of Line 58, and $|T(e)| > 1$. It follows that $\text{collected}_e = \text{false}$.

Conversely, suppose for that, at Line 58, $\text{collected}_e = \text{false}$, and all the $x \in T(e)$ satisfies $\text{FIND}(x) = U$. Clearly, $|T(e)| > 1$ (otherwise, e would have been placed into F at Line 21 and collected_e would be equal to true). Few steps before, at Line 49, $\text{FIND}(x)$ is equal to one of X_j , $1 \leq j \leq q$. Since $\text{index}[X_j]$ is defined (X_j is an element of the stack S), by Inv. 1, $\text{index}[x]$ is also defined for all $x \in T(e)$, hence, the root r_e is defined by Inv. 4. Besides, $\text{FIND}(r_e)$ is equal to one of the X_j , say X_k (since $r_e \in T(e)$). As all the $\text{FIND}(x)$ are reachable from $\text{FIND}(r_e)$ in $G(\mathcal{H}_{cur})$, then $c_e = |T(e)|$ using Invariant 7. It follows that e has been pushed on the stack F_{R_e} , where $R_e = \text{FIND}(r_e, \mathcal{H}_{old})$ in an previous state old of the algorithm. As $\text{collected}_e = \text{false}$,

e has not been popped from F_{R_e} , and consequently, the node R_e of $\mathcal{H}_{old}$ has not involved in a node merging step. Therefore, R_e is still equal to $\text{FIND}((r_e, \mathcal{H}_{cur}) = X_k$. It follows that at Line 49, e is stored in F_{X_k} , and thus it is copied to F between Lines 49 and 56. This completes the proof. $\square$

We now can prove the correctness of MINSCCCOUNT. By Proposition 13, Line 58 can be safely removed in HVISIT3. It follows that the booleans *collected_e* are now useless, to that Lines 5, 33, and 59 can be also removed. After that, we precisely obtain the algorithm MINSCCCOUNT. Proposition 12 completes the proof. $\square$

D.2 Complexity Proof

Then analysis of the time complexity MINSCCCOUNT depends on the kind of the instructions. We distinguish:

- (i) the operations on the global stacks F_u and on the local stacks F ,
- (ii) the call to the functions FIND, MERGE, and MAKESET,
- (iii) and the other operations, referred to as *usual operations*. By extension, their time complexity will be referred to as *usual complexity*.

Also note that the function HVISIT(u) is executed exactly once for each $u \in N$ during the execution of MINSCCCOUNT.

Operations on the Stacks F and F_u . Each operation on the stack (pop or push) is in $O(1)$. A given hyperedge is pushed on a stack of the form F_u at most once during the whole execution of MINSCCCOUNT. Once it is popped from it, it will never be pushed on a stack of the form F_v again. Similarly, a hyperedge is pushed on a local stack F at most once, and after it is popped from it, it will never be pushed on any local stack F' in the following states. Therefore, the total number of stack operations on the local and global stacks F and F_u is bounded to by $4|N|$. It follows that the corresponding complexity is $O(|N|)$.

As a consequence, the total of the number of iterations of the loop from Lines 53 to 62 which occur during the whole execution of MINSCCCOUNT is bounded to $\sum_{e \in E} |H(e)|$.

Union-find Operations. During the whole execution of MINSCCCOUNT, the function FIND is called:

- exactly $|N|$ times at Line 35,
- at most $\sum_{u \in N} |E_u| = \sum_{e \in E} |T(e)|$ times at Line 42 (since during the call to HVISIT(u), the loop from Lines 38 to 50 has exactly $|E_u|$ iterations),
- at most $\sum_{e \in E} |H(e)|$ at Line 54 (see above).

Hence it is called at most $\text{size}(\mathcal{H})$ times.

The function MERGE is always called to merge two distinct nodes. Let $C_1, \dots, C_p$ ($p \leq |N|$) be the equivalence classes formed by the elements of N at the end of the execution of MINSCCCOUNT. Then MERGE has been called at most $\sum_{i=1}^p (|C_i| - 1)$. Since $\sum_i |C_i| = |N|$, MERGE is executed at most $|N| - 1$ times.

Finally, MAKESET is called exactly $|N|$ times. It follows that the total time complexity of the operations MAKESET, FIND and MERGE is $O(\text{size}(\mathcal{H}) \times \alpha(|N|))$.

Usual Operations. The analysis of the usual complexity is split into several parts:


- the usual complexity MINSCCCOUNT without the calls to the function HVISIT is clearly $O(|N| + |E|)$.

- during the execution of $HV\text{ISIT}(u)$, the usual complexity of the block between Lines 35 and 50 is $O(1) + O(|E_u|)$. Indeed, we suppose that the test at Line 43 can be performed in $O(1)$ by assuming that the stack S is provided with an auxiliary array of booleans which determines, for each element of N , whether it is stored in S .⁴ Then the total usual complexity between Lines 35 and 50 is $O(\text{size}(\mathcal{H}))$ for a whole execution of $\text{MINSCC}\text{COUNT}$.
- the usual complexity of the body of loop from Lines 53 to 62, without the recursive calls to $HV\text{ISIT}$, is clearly $O(1)$. As mentioned above, the total number of iterations of this loop is less than $\sum_{e \in E} |H(e)| \leq \text{size}(\mathcal{H})$. Therefore, the total usual complexity of the loop from Lines 51 to 63 is in $O(\text{size}\mathcal{H})$.
- the usual complexity of the loop between Lines 69 and 73 for a whole execution of $\text{MINSCC}\text{COUNT}$ is $O(|N|)$, since in total, it is iterated exactly the number of times the function MERGE is called.
- the usual complexity of the loop between Lines 78 and 80 for a whole execution of $\text{MINSCC}\text{COUNT}$ is $O(|N|)$, because a given element is placed at most once into Finished .
- if the two previous loops are not considered, less than 10 usual operations are executed in the block from Lines 64 to 82, all of complexity $O(1)$. The execution of this block either follows a call to $HV\text{ISIT}$ or the execution of the goto statement (at Line 75). The latter is executed only if the stack F is not empty. Since each hyperedge can be pushed on a local stack F and then popped from it only once, it is executed $|E|$ in the worst case during the whole execution of $\text{MINSCC}\text{COUNT}$. It follows that the usual complexity of the block from Lines 64 to 82 is $O(|N| + |E|)$ in total (excluding the loops previously discussed).

Total Time Complexity. Summing all the complexities above proves that the time complexity of $\text{MINSCC}\text{COUNT}$ is $O(\text{size}(\mathcal{H}) \times \alpha(|N|))$. $\square$


E An Example of an Execution Trace of the Algorithm $\text{MINSCC}\text{COUNT}$

In this section, we give the main steps of the execution of $\text{MINSCC}\text{COUNT}$ on the hypergraph depicted in Fig. 8:




Nodes are depicted by solid circles if their index is defined, and by dashed circles otherwise. Once a node is placed into Finished , it is depicted in gray. Similarly, a hyperedge which has never been placed into a local stack F is represented by dotted lines. Once it is pushed into F , it becomes solid, and when it is popped from F , it is colored in gray (note that for sake of readability, gray hyperedges mapped to cycles after a node merging step will be removed). The stack F which is mentioned always corresponds to the stack local to the last non-terminated call of the function VISIT .

Initially, $\text{FIND}(z) = z$ for all $z \in \{u, v, w, x, y, t\}$. We suppose that $HV\text{ISIT}(u)$ is called first. After the execution of the block from Lines 35 to 50, the current state is:

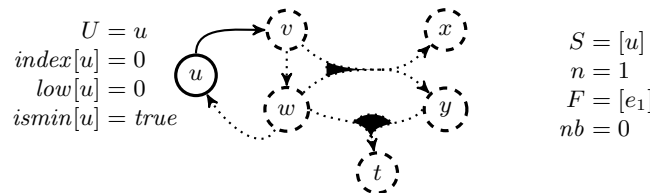


⁴ Obviously, the push and pop operations on the stack S are still in $O(1)$ under this assumption.


Following the hyperedge e_1 , $HVISIT(v)$ is called during the execution of the block from Lines 51 to 63 of $HVISIT(u)$. After Line 50 in $HVISIT(v)$, the root of the hyperedge e_4 is set to v , and the counter c_{e_4} is incremented to 1 since $v \in S$. The state is:

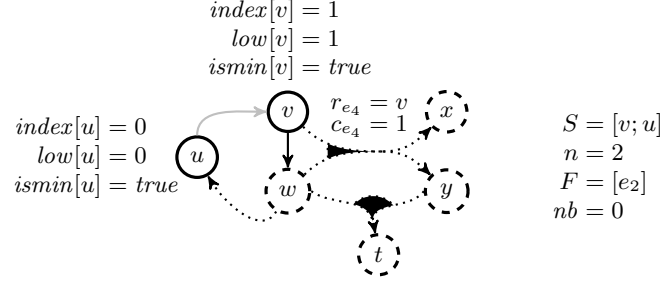


Similarly, $HVISIT(w)$ is called during the execution of the loop from Lines 51 to 63 of $HVISIT(v)$. After Line 50 in $HVISIT(w)$, the root of the hyperedge e_5 is set to w , and the counter c_{e_5} is incremented to 1 since $w \in S$. Besides, the c_{e_4} is incremented to 2 = $|T(e_4)|$ since $FIND(r_{e_4}) = FIND(v) = v \in S$, so that e_4 is pushed on the stack F_v . The state is:

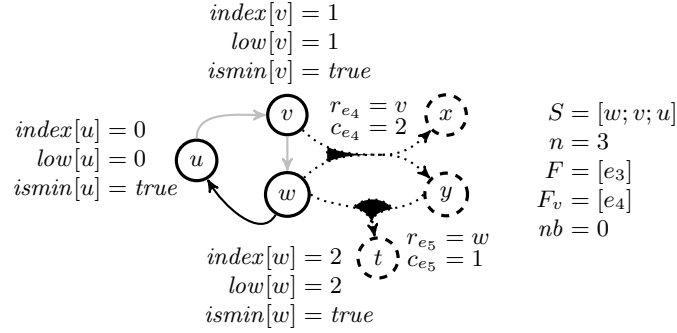


The execution of the loop from Lines 51 to 63 of $HVISIT(w)$ discovers that $index[u]$ is defined but $u \notin Finished$, so that $low[w]$ is set to $\min(low[w], low[u]) = 0$ and $ismin[w]$ to $ismin[w] \&\& ismin[u] = true$. At the end of the loop, the state is therefore:

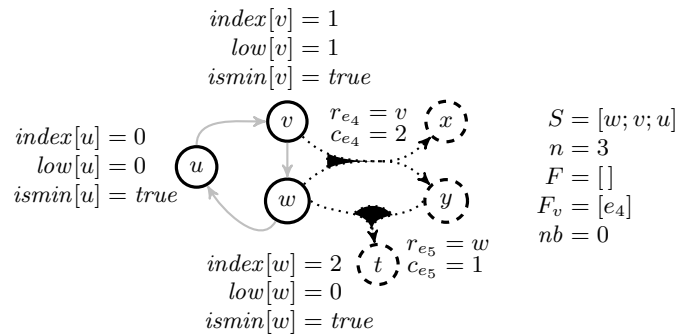


Since $low[w] \neq index[w]$, the block from Lines 64 to 82 is not executed, and $HVISIT(w)$ terminates. Back to the loop from Lines 51 to 63 in $HVISIT(v)$, $low[v]$ is set to $\min(low[v], low[w]) = 0$, and $ismin[v]$ to $ismin[v] \&\& ismin[w] = true$:

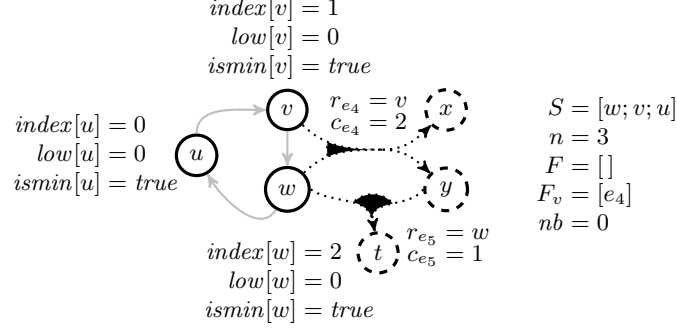


Since $low[v] \neq index[v]$, the block from Lines 64 to 82 is not executed, and $HVISIT(v)$ terminates. Back to the loop from Lines 51 to 63 in $HVISIT(u)$, $low[u]$ is set to $\min(low[u], low[v]) = 0$, and $ismin[u]$ to $ismin[u] \&\& ismin[v] = true$. Therefore, at Line 64, the conditions $low[u] = index[u]$ and $ismin[u] = true$ hold, so that a node merging step is executed. At that point, the stack F is empty. After that, i is set to $index[u] = 0$ (Line 66), and $F_u = []$ is emptied to F (Line 67), so that F is still empty. Then w is popped from S , and since $index[w] = 2 > i = 0$, the loop from Lines 69 to 73 is iterated. Then the stack $F_w = []$ is emptied in F . At Line 71, $MERGE(u, w)$ is called. The result is denoted by U (in practice, either $U = u$ or $U = w$). The state is:

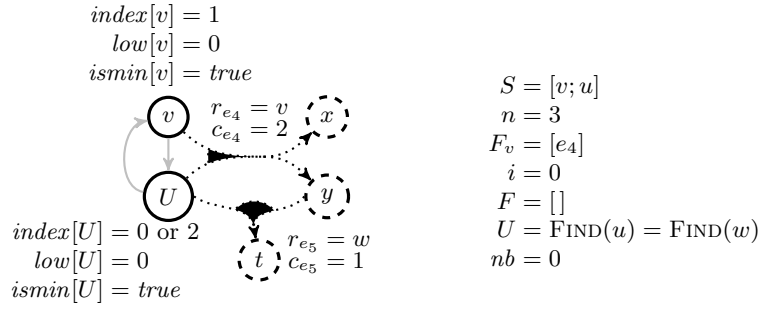


Then v is popped from S , and since $index[v] = 1 > i = 0$, the loop Lines 69 to 73 is iterated again. Then the stack $F_u = [e_4]$ is emptied in F . At Line 71, $MERGE(U, v)$ is called. The result is set to U (in practice, U is one of the nodes u, v, w). The state is:

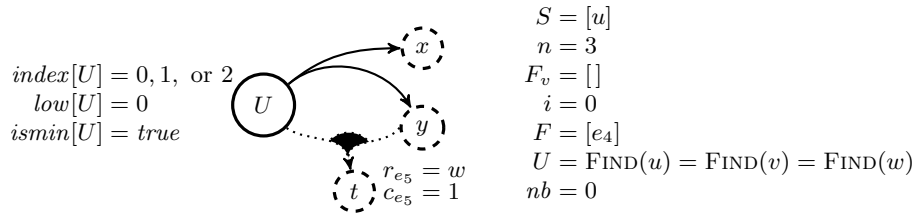


After that, u is popped from S , and as $index[u] = 0 = i$, the loop is terminated. At Line 74, $index[U]$ is set to i , and U is pushed on S . Since $F \neq \emptyset$, we go back to Line 51, in the state:

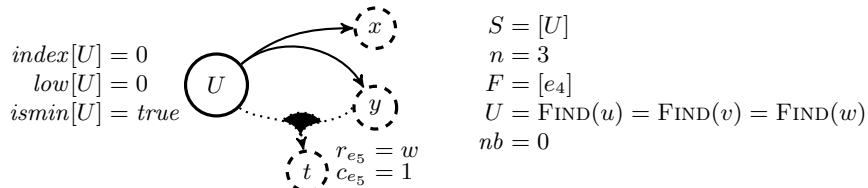


Then e_4 is popped from F , and the loop from 53 to 62 iterates over $H(e_4) = \{x, y\}$. Suppose that x is treated first. Then $VISIT(x)$ is called. During its execution, at Line 50, the state is:

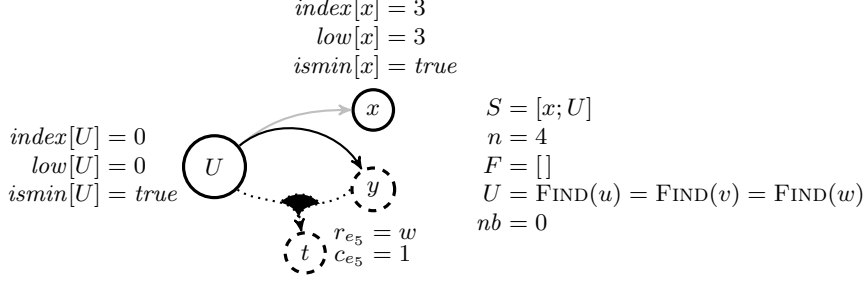


Since F is empty, the loop from Lines 51 to 63 is not executed. At Line 64, $low[x] = index[x]$ and $ismin[x] = true$, so that a trivial node merging step is performed, only on x , since it is the top element of S . At Line 74, it can be verified that $S = [x; U]$, $index[x] = 3$ and $F = []$. Therefore, the goto statement at Line 75 is not executed, and nb is incremented at Line 76. It follows that the loop from Lines 78 to 80 is executed, and after that, the state is:

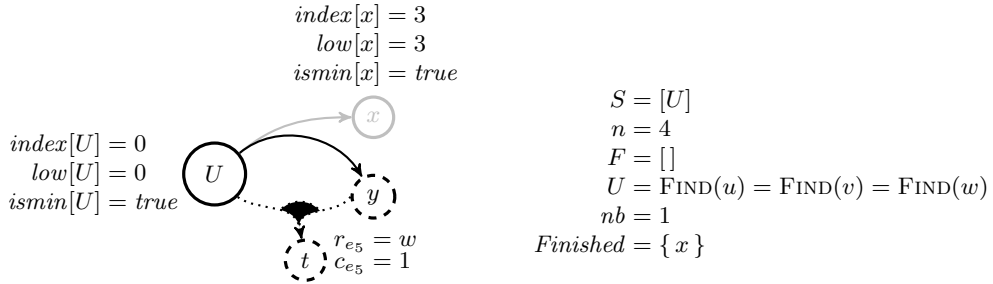


After the termination of $\text{HVISIT}(x)$, since $x \in Finished$, $ismin[U]$ is set to *false*. After that, $\text{HVISIT}(y)$ is called, and at Line 50, it can be checked that c_{e_5} has been incremented to $2 = |T(e_5)|$ because $R_{e_5} = \text{FIND}(r_{e_5}) = \text{FIND}(w) = U$ and $U \in S$. Therefore, e_5 is pushed to F_U , and the state is:

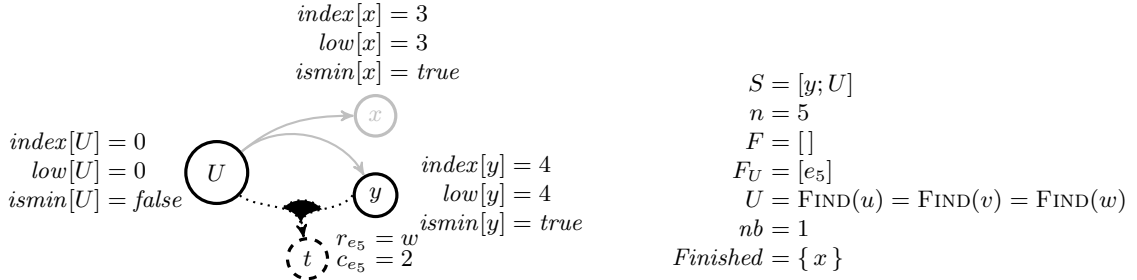


As for the node x , $\text{HVISIT}(y)$ terminates by incrementing nb , popping y from S and adding it to $Finished$. Back to the execution of $\text{HVISIT}(U)$, at Line 64, the state is:

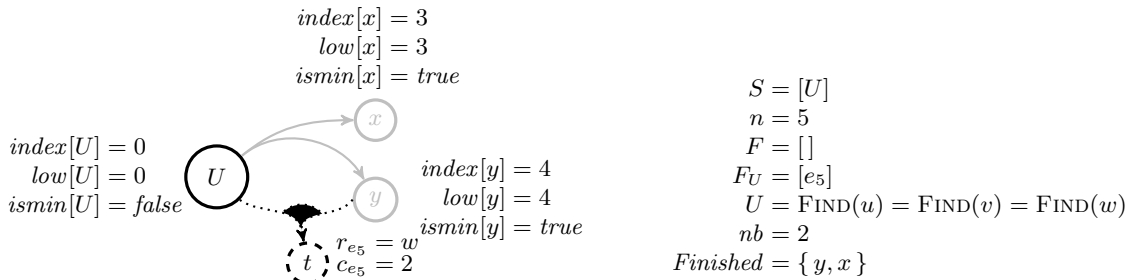

While $low[U] = index[U]$, $ismin[U]$ is equal to *false*, so that no node merging loop is performed on U . Therefore, e_5 is not popped from F_U and nb is not incremented. Nevertheless, the loop from Lines 78 to 80 is executed, and after that, $\text{HVISIT}(u)$ is terminated in the state:

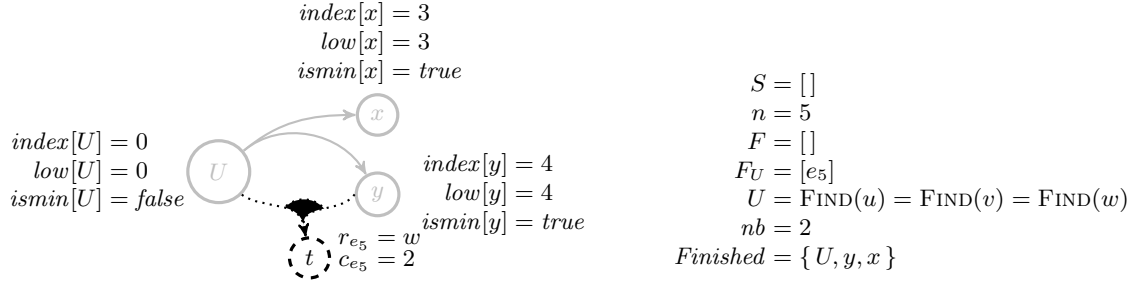

Finally, $H\text{VISIT}(t)$ is called from MINSCCCOUNT at Line 10. It can be verified that a trivial node merging loop is performed on t only, and that nb is incremented. After that, t is placed into $Finished$. Therefore, the final state of MINSCCCOUNT is:

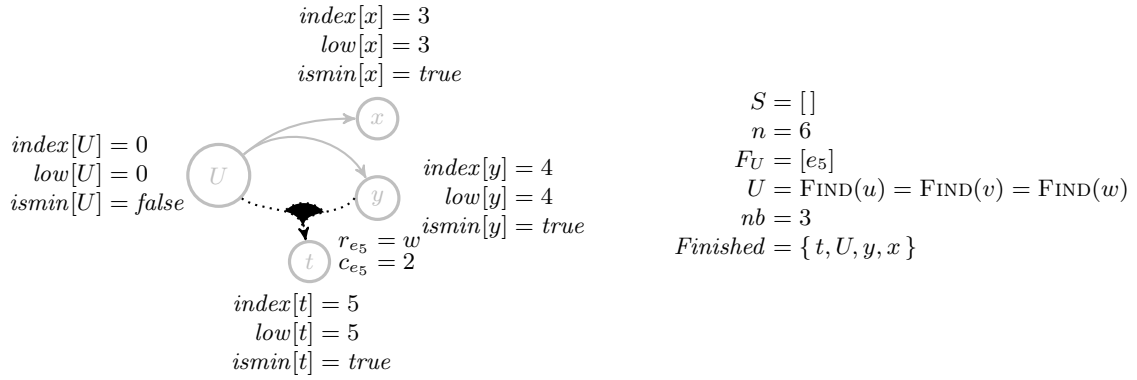


Consequently, there is 3 minimal SCCs in the hypergraph. As $ismin[x] = ismin[y] = ismin[t] = true$ and $ismin[\text{FIND}(z)] = false$ for $z = u, v, w$, they are given by the sets:

$$\begin{aligned}
 \{z \mid \text{FIND}(z) = x\} &= \{x\} \\
 \{z \mid \text{FIND}(z) = y\} &= \{y\} \\
 \{z \mid \text{FIND}(z) = t\} &= \{t\}.
 \end{aligned}$$

F Determining All SCCs in a Hypergraph

We just give an example of hypergraph for which our algorithm does not compute all the SCCs, but only minimal ones:



Our algorithm determines that $\{t\}$ is the least SCC. However, u and x stand in the same SCC, but they are not merged by the algorithm. This is similar for v and y .